

Glass Accessories



for tempered glass door

PF-101-A, A-WF, B, C-N/D, S, T	GA4
PF-102, C, D, CS, S	GA5
PF-103-A, B, S	GA5
PF-105	GA6
PF-111-N	GA6
DT-082G	GA10
DT-082H	GA12
DT-082HT	GA14
PF-112	GA16
PF-115	GA16
PF-117	GA16
PF-118	GA16
PF-116-05, 15, 35, 63, 65, 68	GA18
GHA-01, 01A, 01F	GA20
GHA-02	GA20
GHA-04	GA20
GHA-05	GA20
GHC-01, 01A, 01F	GA22
GHC-04	GA22
GHC-05	GA22
GHE-01-RH (90 °)	GA25
GHE-05-RH (180 °)	GA26
GS-072	GA27
GT- 201, 202, 203	GA27
GT-101-X / GT-101M-X	GA28
GT-101-L / GT-101M-L	GA28
GT-101-Y / GT-101M-Y	GA28
GT-104-L	GA29
GT-108-L, X, Y, D	GA29
GT-109-X, L, Y, D	GA30
GT-109B-L, D	GA30
GT-110-X, L, Y, D	GA31
GT-111-X, L, Y, D	GA32
GT-111C-L, D	GA32
GT-112-X, L, Y, D	GA33
GT-113-X, L, Y, D	GA34
GT-114-X, L, Y, D	GA35
GT-115-X, L, Y, D	GA36
CH-SG-A	GA40
SD-1-A	GA40
GHR-01A, 01B, 01D, 05	GA41
GHL Series Glass Hinges	GA42
WS-1N, 2N, 3N, 4N, 5N	GA43
WS-6N, 7N, 8N, 9N, 10N	GA44
EHB-001 X	GA46
EHB-002 X	GA46
EHB-003 X	GA46
EHB-004 X	GA46
EHB-005 X	GA46
EHB-010 X	GA46
EHB-016-01-X / 016-02-X	GA46
EHB-016A-01-X / 016A-02-X	GA46
EHB-017 X	GA46
EHB-018 X	GA46
EHB-019 X	GA46
EHB-020 X	GA46
EHB-021 X	GA46
EHZ-001 X	GA48
EHZ-002 X	GA48
EHZ-003 X	GA48
EHZ-004 X	GA48
EHZ-006 X	GA48
EHZ-007 X	GA48
GBK-801-A-X	GA49
GBK-802-A-X	GA49
GBK-803-A-X	GA49
GBK-804-A-X	GA49
GBK-805-A-X	GA49

GBK-806-A-X	GA49
GBK-895-X	GA49
GBK-896-X	GA49
GBK-898-40-A-X	GA49
HSG-501A-X	GA51
HSG-503A-X	GA51
HSG-504A-X	GA51
HSG-506A-X	GA51
HSG-507A-X	GA51
HSG-508A-X	GA51
HSG-509A-X	GA51
HSG-512A-X	GA51
HSG-520A-X	GA51
HSG-527A-X	GA51
HSG-528A-X	GA51
HSG-529A-X	GA51
HSG-530A-X	GA51
SBG-201A-X	GA52
SBG-202A-X	GA52
SBG-203C-X	GA52
SBG-204A-X	GA52
SBG-205A-X	GA52
SBG-206A-X	GA52
SBG-207A-X	GA52
SBG-208A-X	GA52
SBG-209A-X	GA52
SBG-210A-X	GA53
SBG-211A-X	GA53
SBG-212A-X	GA53
SBG-213A-X	GA53
SBG-214A-X	GA53
SBG-215A-X	GA53
SBG-216A-X	GA53
SBG-217A-X	GA53
SBG-219A-X	GA53
SBG-220A-X	GA53
SBG-221A-X	GA53
SBG-222A-X	GA53
SBG-223H-X	GA53
SBG-225A-X	GA53
SBG-226A-X	GA53
NLG-802H-X	GA54
NLG-803L-X	GA54
NLG-804K-X	GA54
NLG-805H-X	GA54
NLG-806C-X	GA54
NLG-807P-X	GA54
NLG-808M-X	GA54
NLG-809A-X	GA54
NLG-810N-X	GA54
NLG-811Q-X	GA55
NLG-812M-X	GA55
NLG-813N-X	GA55
NLG-814J-X	GA55
NLG-815C-X	GA55
NLG-816H-X	GA55
NLG-817H-X	GA55
NLG-818A-X	GA55
NLG-819C-X	GA55
NLG-820H-X	GA55
NLG-821K -X	GA55
NLG-822C -X	GA55
NLG-823H -X	GA55


	Patch Fittings	GA4-GA9
	Glass Sliding Door Track Sets	GA10-GA15
	Glass Door Locks	GA16-GA17
	Glass Sliding Door Locks	GA18-GA19
	GHA Series Shower Door Hinges	GA20-GA21
	GHC Series Shower Door Hinges	GA22-GA23
	GHE Series Shower Door Hinges/ Calculation Glass Sizes	GA24-26
	Header Panel Support Bars	GA27
	Towel Bars with Pull Knob	GA28-39
	Towel Bars with Pull Handle	GA40
	GHR Series Glass Hinges	GA41
	GHL Series Glass Hinges	GA42
	Shower Door Vinyl Water Seals	GA43-GA45
	EHB Series Glass Type Handles	GA46-GA47
	EHZ Series Glass Type Handles	GA48
	GBK Series Glass Knobs	GA49-50
	HSG Series Glass Lever Handles	GA51
	SBG Series Glass Lever Handles	GA52-53
	NLG Series Glass Lever Handles	GA54-55

Numerous patents, copyrights, and trademarks are held by us to protect the integrity and reputation of our distinctive line of hardware appointments. Manufacturer reserves all rights of any modification, materials and specifications without notice.

PATCH FITTINGS


Inserts :

N Type



For FH-800 Series Floor Hinges

D Type



For FH-300 Series Floor Hinges

PF-101-A

Overhead Pivot Patch

Finish : F24, F25, F91, F93, F94, F96, F97
Body Material : Zinc Alloy
Cover Material : Stainless Steel
Screw : Max Torque 100kg Loading
Glass Thickness: 12mm,
optional thickness 15mm



PF-101-A-WF

Overhead Pivot Patch with Wall Fixing

Finish : F24, F25, F91, F93, F94, F96, F97
Body Material : Zinc Alloy
Cover Material : Stainless Steel
Screw : Max Torque 100kg Loading
Glass Thickness: 12mm,
optional thickness 15mm



PF-101-B

Top Patch

Finish : F24, F25, F91, F93, F94, F96, F97
Body Material : Zinc Alloy
Cover Material : Stainless Steel
Screw : Max Torque 100kg Loading
Glass Thickness: 12mm,
optional thickness 15mm



PF-101-C-N/D

Bottom Patch

Finish : F24, F25, F91, F93, F94, F96, F97
Body Material : Zinc Alloy
Cover Material : Stainless Steel
Screw : Max Torque 100kg Loading
Inserts : D, N Type
Glass Thickness: 12mm,
optional thickness 15mm



N or D Type

PF-101-S

Overhead Pivot Single Stop Patch

Finish : F24, F25, F91, F93, F94, F96, F97
Body Material : Zinc Alloy
Cover Material : Stainless Steel
Screw : Max Torque 100kg Loading
Glass Thickness: 12mm,
optional thickness 15mm



PF-101-T

Overhead Pivot Double Stop Patch

Finish : F24, F25, F91, F93, F94, F96, F97
Body Material : Zinc Alloy
Cover Material : Stainless Steel
Screw : Max Torque 100kg Loading
Glass Thickness: 12mm,
optional thickness 15mm



PF-102

Patch Lock with Double Cylinder

Finish : F24, F25, F91, F93, F94, F96, F97
 Body Material : Zinc Alloy
 Cover Material : Stainless Steel
 Screw : Max Torque 100kg Loading
 GlassThickness: 12mm,
 optional thickness 15mm



PF-102-S

Patch Lock Single Cylinder with Turn Piece

Finish : F24, F25, F91, F93, F94, F96, F97
 Body Material : Zinc Alloy
 Cover Material : Stainless Steel
 Screw : Max Torque 100kg Loading
 GlassThickness: 12mm,
 optional thickness 15mm



PF-102-C

Center Patch Lock with Double Cylinder

Finish : F24, F25, F91, F93, F94, F96, F97
 Body Material : Zinc Alloy
 Cover Material : Stainless Steel
 Screw : Max Torque 100kg Loading
 GlassThickness: 12mm,
 optional thickness 15mm



PF-102-CS

Center Patch Lock Single Cylinder with Turn Piece

Finish : F24, F25, F91, F93, F94, F96, F97
 Body Material : Zinc Alloy
 Cover Material : Stainless Steel
 Screw : Max Torque 100kg Loading
 GlassThickness: 12mm,
 optional thickness 15mm



PF-102-D

Center Patch Lock Strike Box

Finish : F24, F25, F91, F93, F94, F96, F97
 Body Material : Zinc Alloy
 Cover Material : Stainless Steel
 Screw : Max Torque 100kg Loading
 GlassThickness: 12mm,
 optional thickness 15mm



PF-103-A

Overhead Side Panel Pivot Patch

Finish : F24, F25, F91, F93, F94, F96, F97
 Body Material : Zinc Alloy
 Cover Material : Stainless Steel
 Screw : Max Torque 100kg Loading
 GlassThickness: 12mm,
 optional thickness 15mm



PF-103-B

Overhead Side Panel Connector

Finish : F24, F25, F91, F93, F94, F96, F97
 Body Material : Zinc Alloy
 Cover Material : Stainless Steel
 Screw : Max Torque 100kg Loading
 GlassThickness: 12mm,
 optional thickness 15mm



PF-103-S

Overhead Side Panel Connector with Stopper

Finish : F24, F25, F91, F93, F94, F96, F97
 Body Material : Zinc Alloy
 Cover Material : Stainless Steel
 Screw : Max Torque 100kg Loading
 GlassThickness: 12mm,
 optional thickness 15mm



PATCH FITTINGS

Dimensions
in millimeters

PF-105

Patch Lock Strike Box


Finish : F24, F25, F91, F93, F94, F96, F97
Material : Stainless Steel



PF-111-N

Mini Floor Hinge with Top Pivot


Finish : F24, F25, F91, F93, F94, F96, F97
Body Material : Zinc Alloy
Cover Material : Stainless Steel
Inserts : N, D Type
Max door weight 60kg

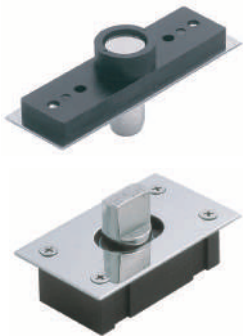


N Type : For 101-C-N
D Type : For 101-C-D

PATCH FITTINGS


Dimensions
in millimeters

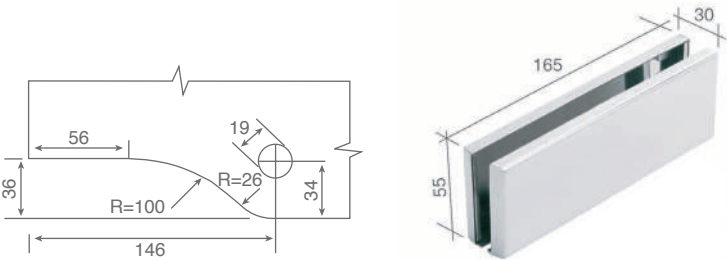


PF-101-A PF-101-A-WF PF-101-C-N

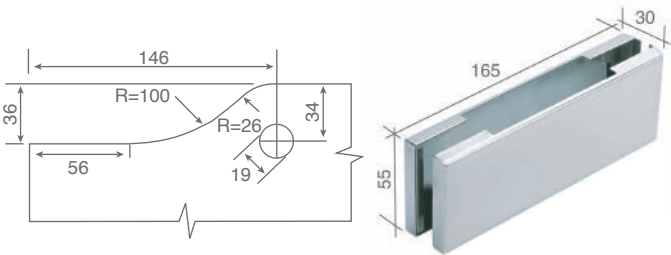


PF-101-B

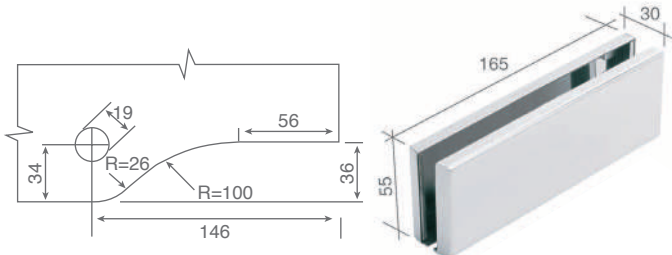


PF-101-S

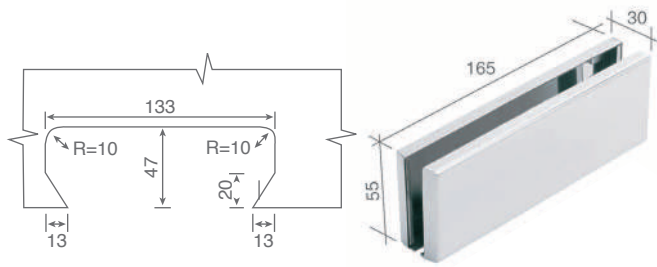


PF-101-T

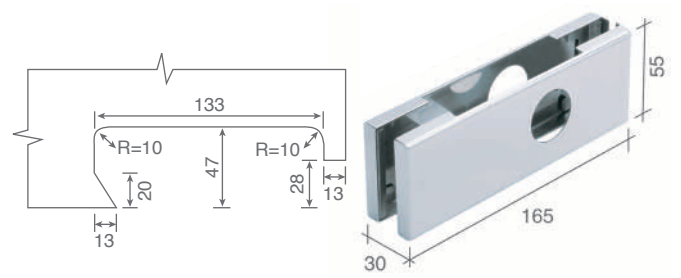


PF-102 PF-102-S

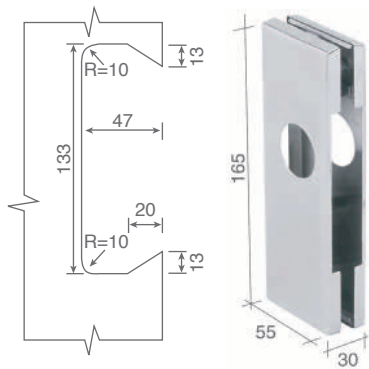



PF-102-C PF-102-CS

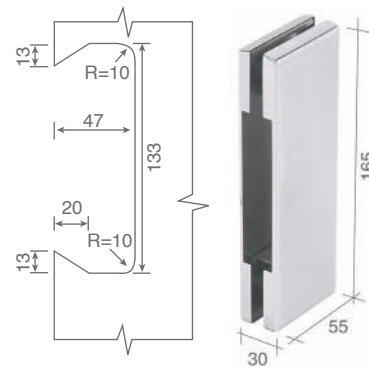



PF-102-D

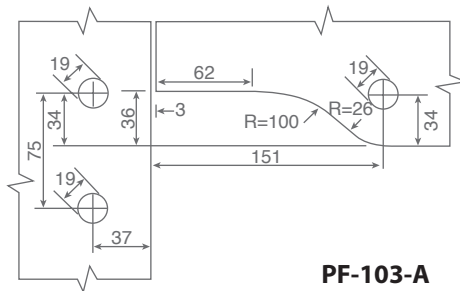


PF-103-A

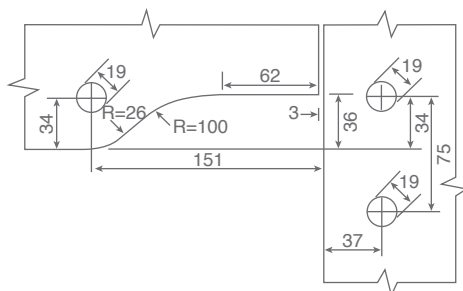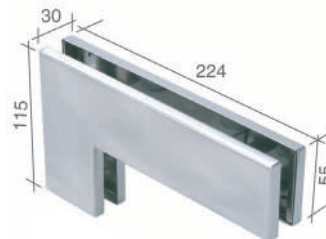


PF-103-B PF-103-S

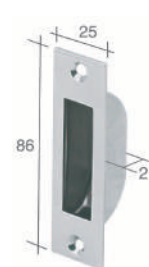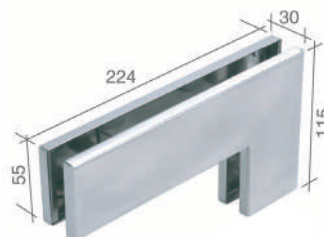

PF-105

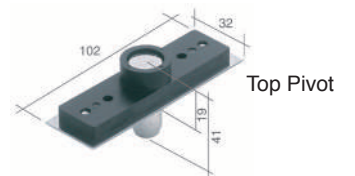


PF-111-N

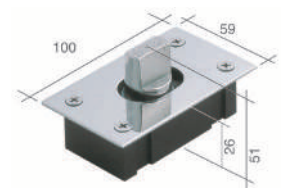


PATCH
FITTINGS

Self mounted flush stainless steel cover with no set screws nor adhesive tape

The self mounted cover has 4 built in flat springs to hold itself firmly onto the body of (BONCO patch fitting) which ensure clean looking, easy assembly and security of the entire unit.

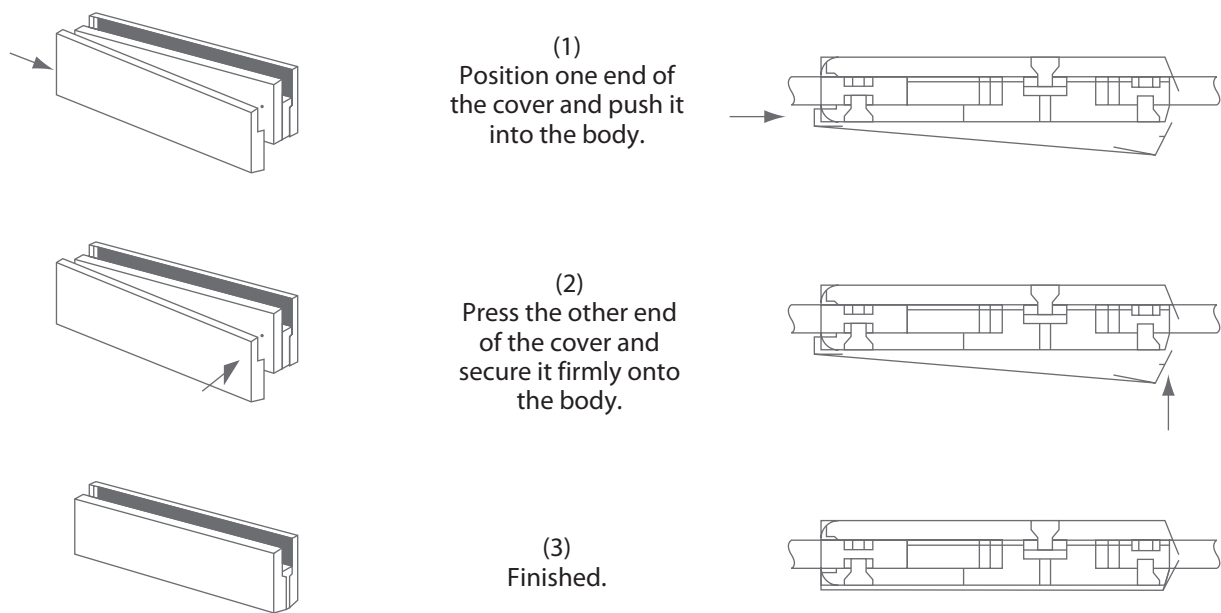


We Recommend Using 12mm or 15mm(optional) Tempered & Safety Glass.
Max door weight 100kg
Max door width 1200 mm

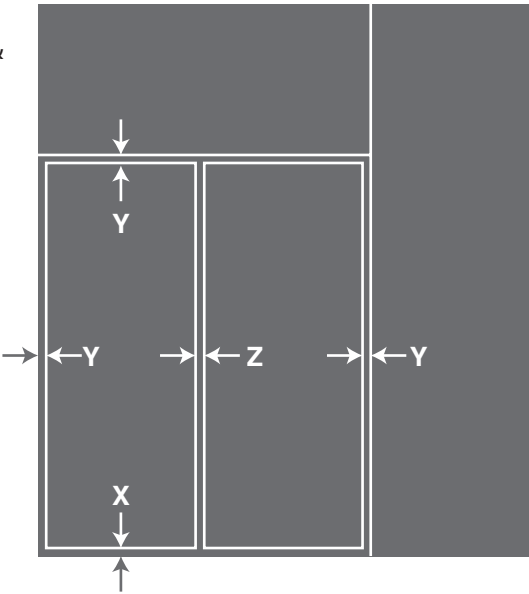

Deduction Dimensions Size
Y = 3~5mm
X = 7~10mm
Z = 3~5mm

Typical Combinations of Tempered Glass Doors & Patch Fitting

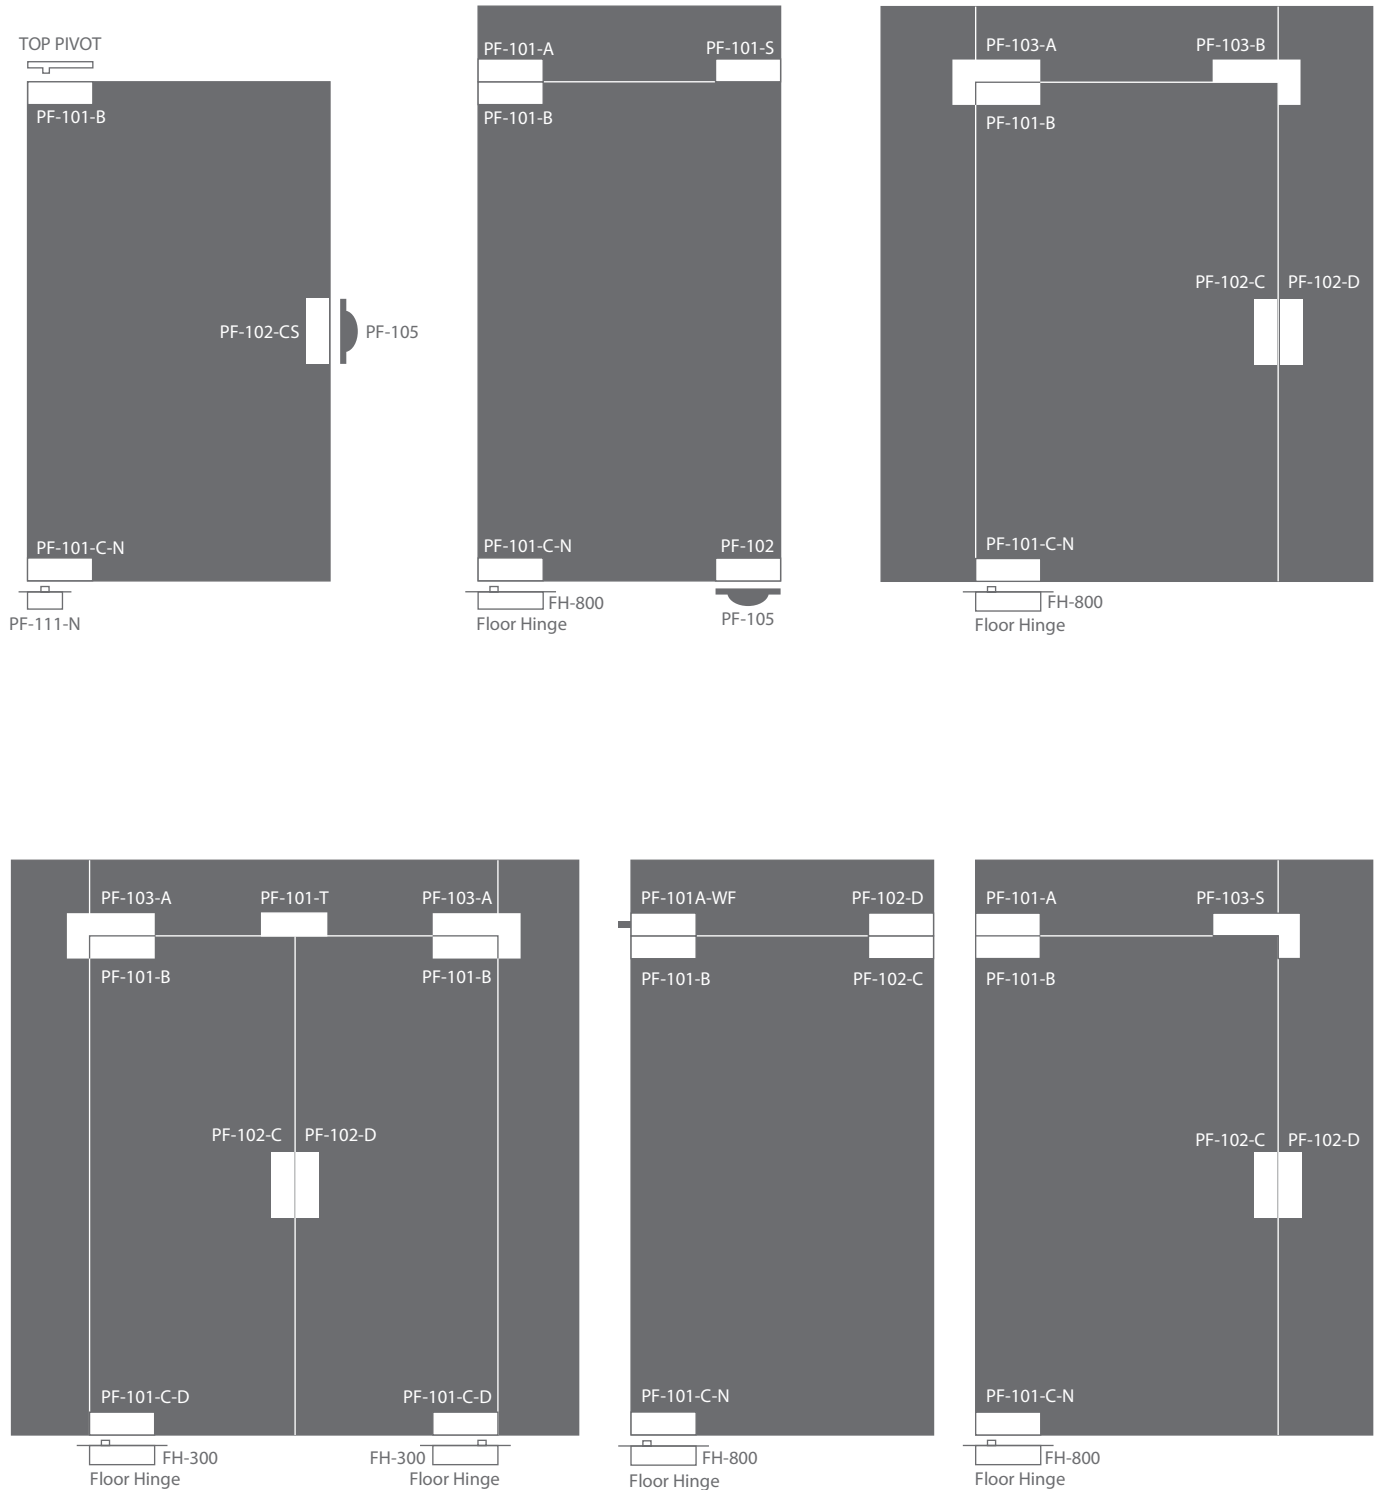


GLASS
SLIDING
DOOR TRACK

DT - 082G
(120 Kgs)


Glass Sliding Door Track Sets
Finishes: F21, F22, F91, F93, F94,
F96, F97 (Except Track)
Door Thickness: 8-15mm
Material: Forged Brass &
Aluminum
(Passed 70,000 Cycle Test)




Top Jamb Fixing

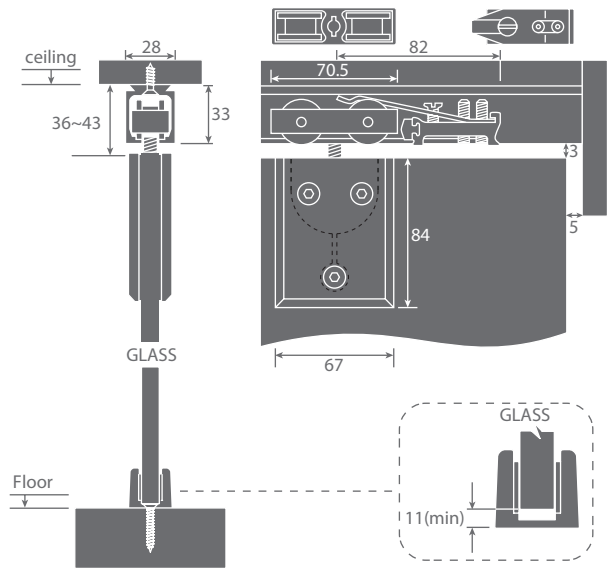


We Recommend Using Tempered & Safety Glass
8mm to 15mm Thickness.

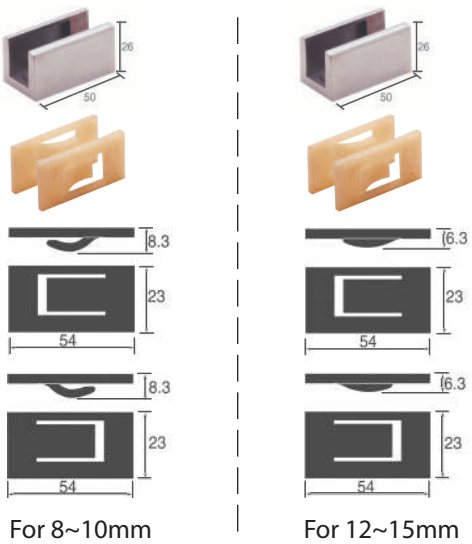


Glass Sliding Door Track Sets Installation

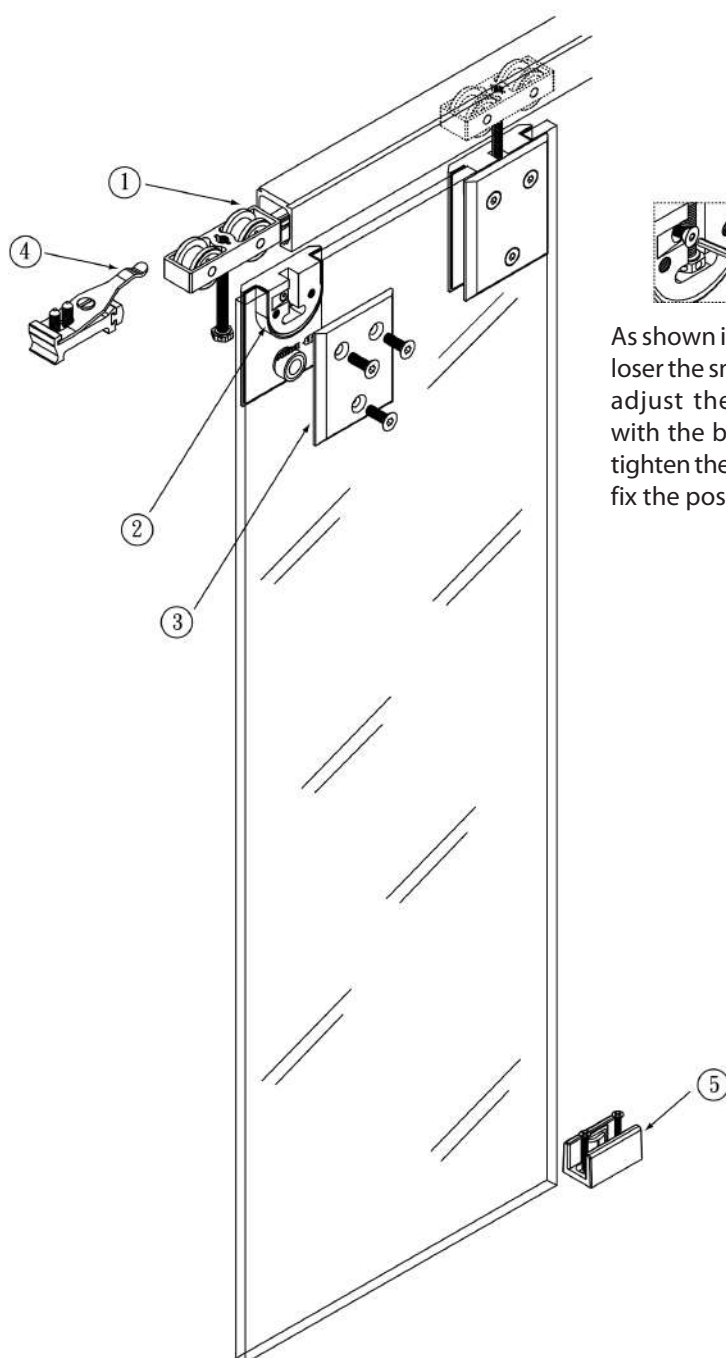


1. Install the track and insert the hangers.




2. Use the alter key to adjust the balance accordingly.




As shown in the diagram, loser the small screw first, adjust the height level with the big screw, then tighten the small screw to fix the position.




3. Clamp outside & inside patches together by tighten the fixing screws back.

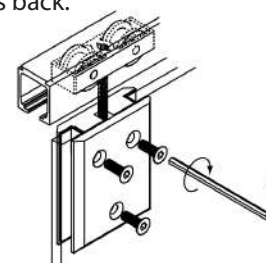

4. Install and adjust the door stopper / holder.




5. Install the floor guides.




GLASS SLIDING DOOR TRACK

**DT - 082H
(100 Kgs)**


Glass Sliding Door Track Sets
Finishes: F21, F22, F91, F93, F94,
F96, F97 (Except Track)
Door Thickness 10-12mm
Material: Zinc Alloy & Aluminum
(Passed 70,000 Cycle Test)

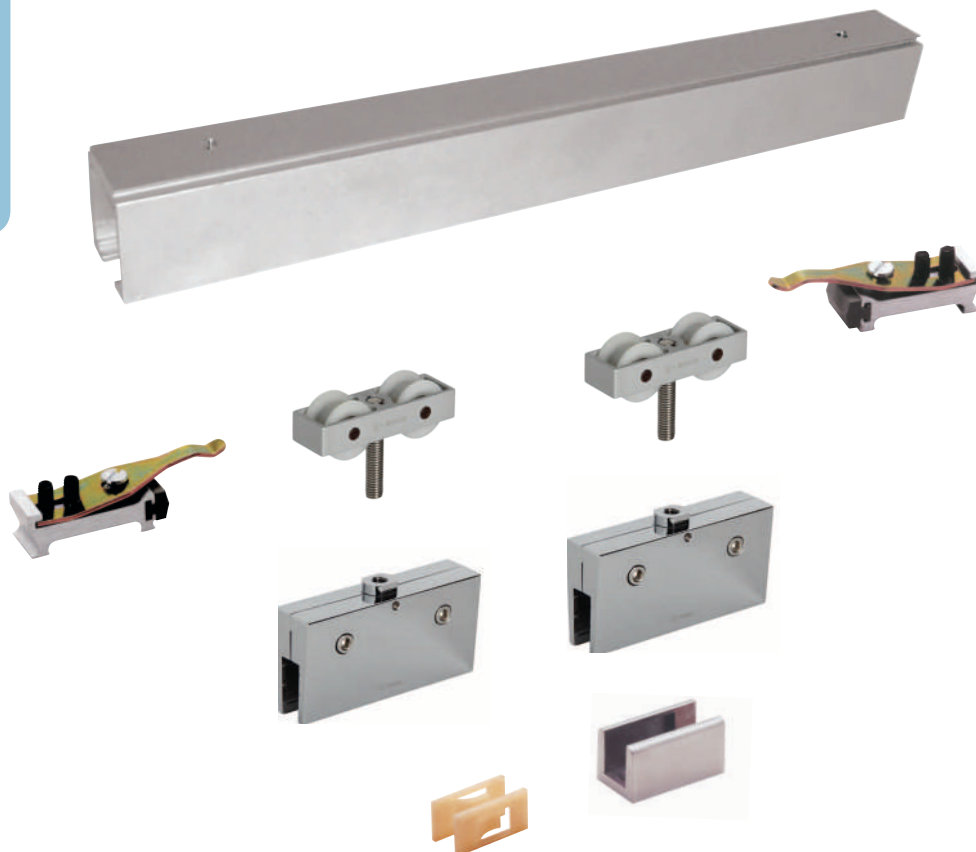


Top Jamb Fixing

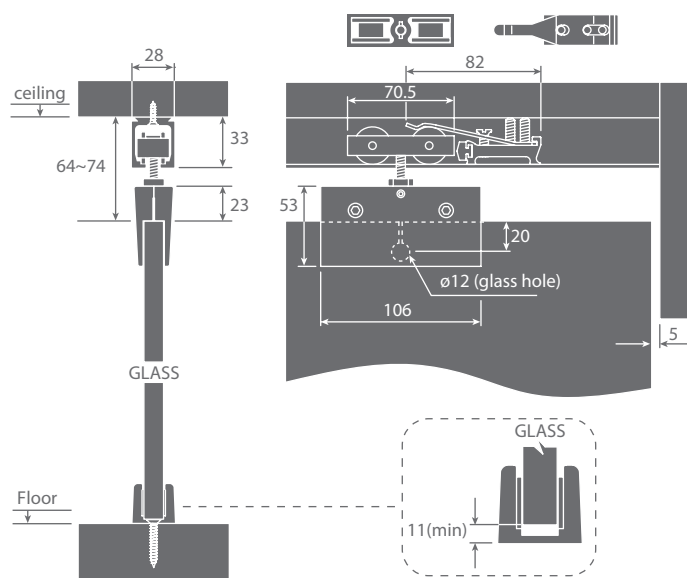

We Recommend Using
Tempered & Safety Glass
10mm to 12mm Thickness.




For 10mm




For 12mm


Glass Sliding Door Track Sets Installation

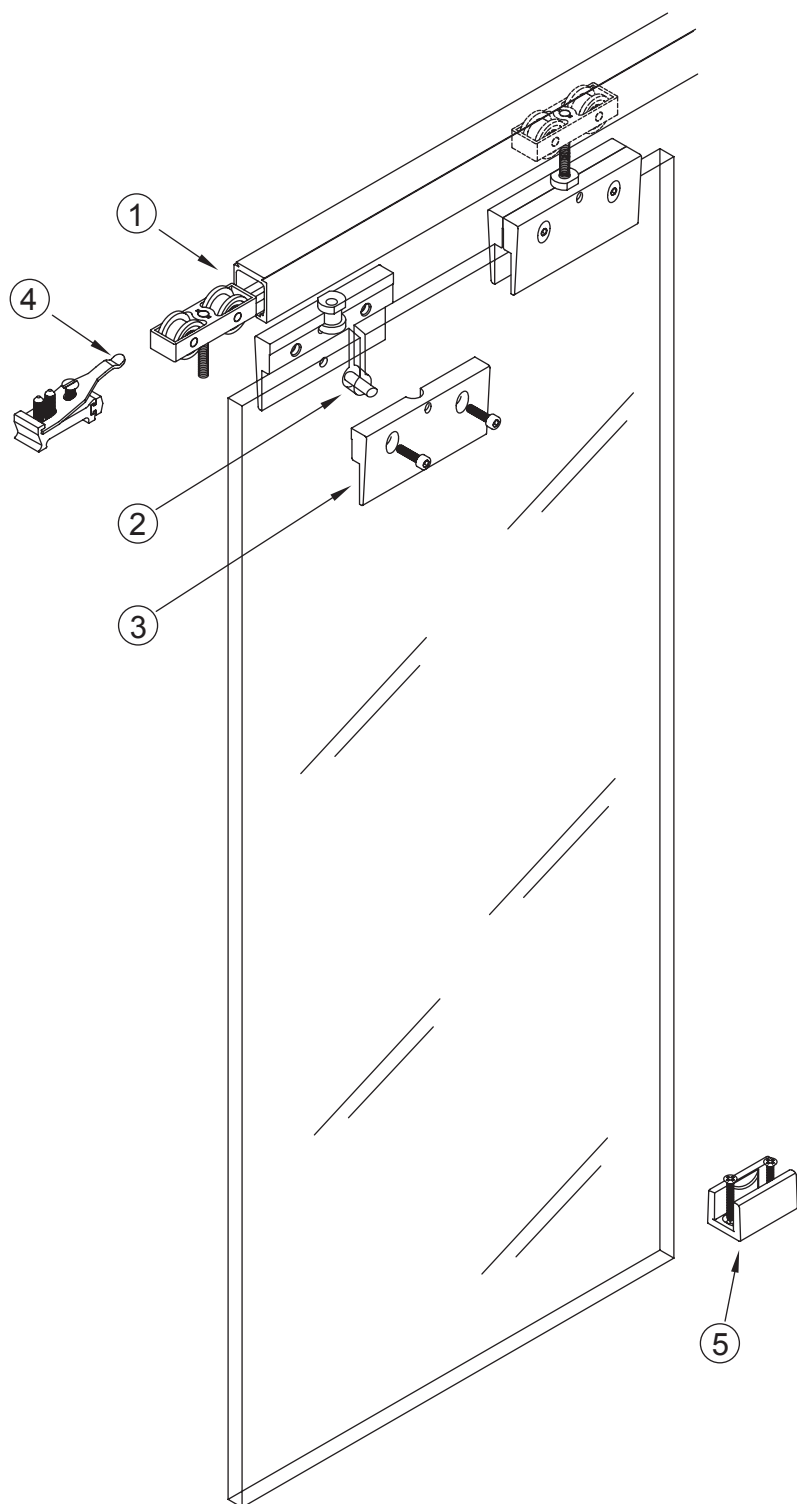


1. Install the track and insert the hangers.

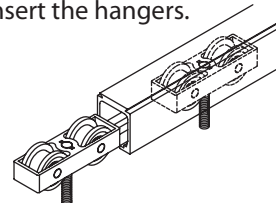


2. Align the glass and insert the pin.

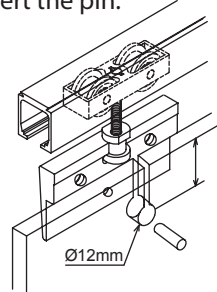


3. Tighten the big screw to fix the glass and adjust the height. Tighten the small screws.

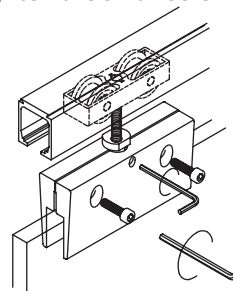

4. Install and adjust the door stopper / holder.



5. Install the floor guides.




GLASS NEW SLIDING DOOR TRACK

**DT - 082HT
(100 Kgs)**


Glass Sliding Door Track Sets
Finishes: F21, F22, F91, F93, F94,
F96, F97 (Except Track)
Door Thickness: 10~12mm
Material: Zinc Alloy & Aluminum
(Passed 70,000 Cycle Test)




Top Jamb Fixing

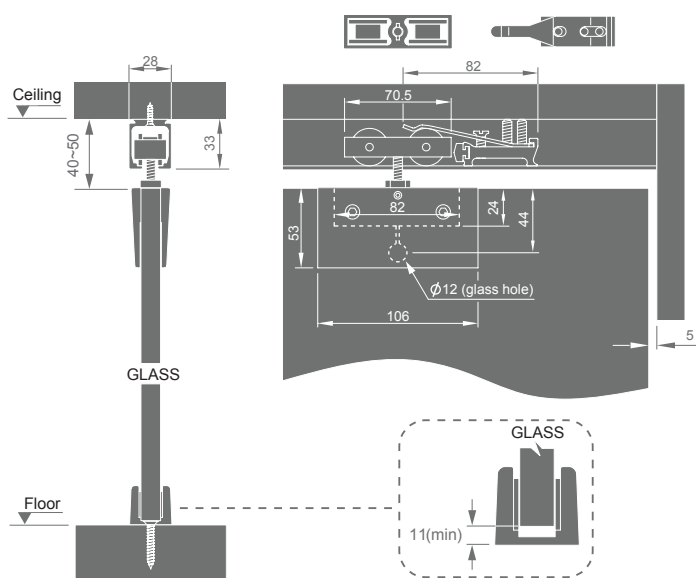


Side Wall Fixing (Only for 38Kgs)

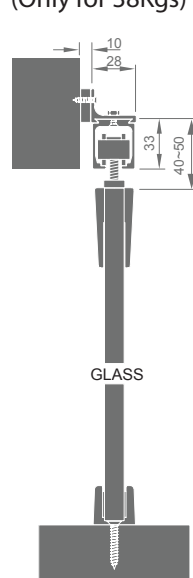

We Recommend Using
Tempered & Safety Glass
10mm to 12mm Thickness.




For 10mm




For 12mm


Glass Sliding Door Track Sets Installation

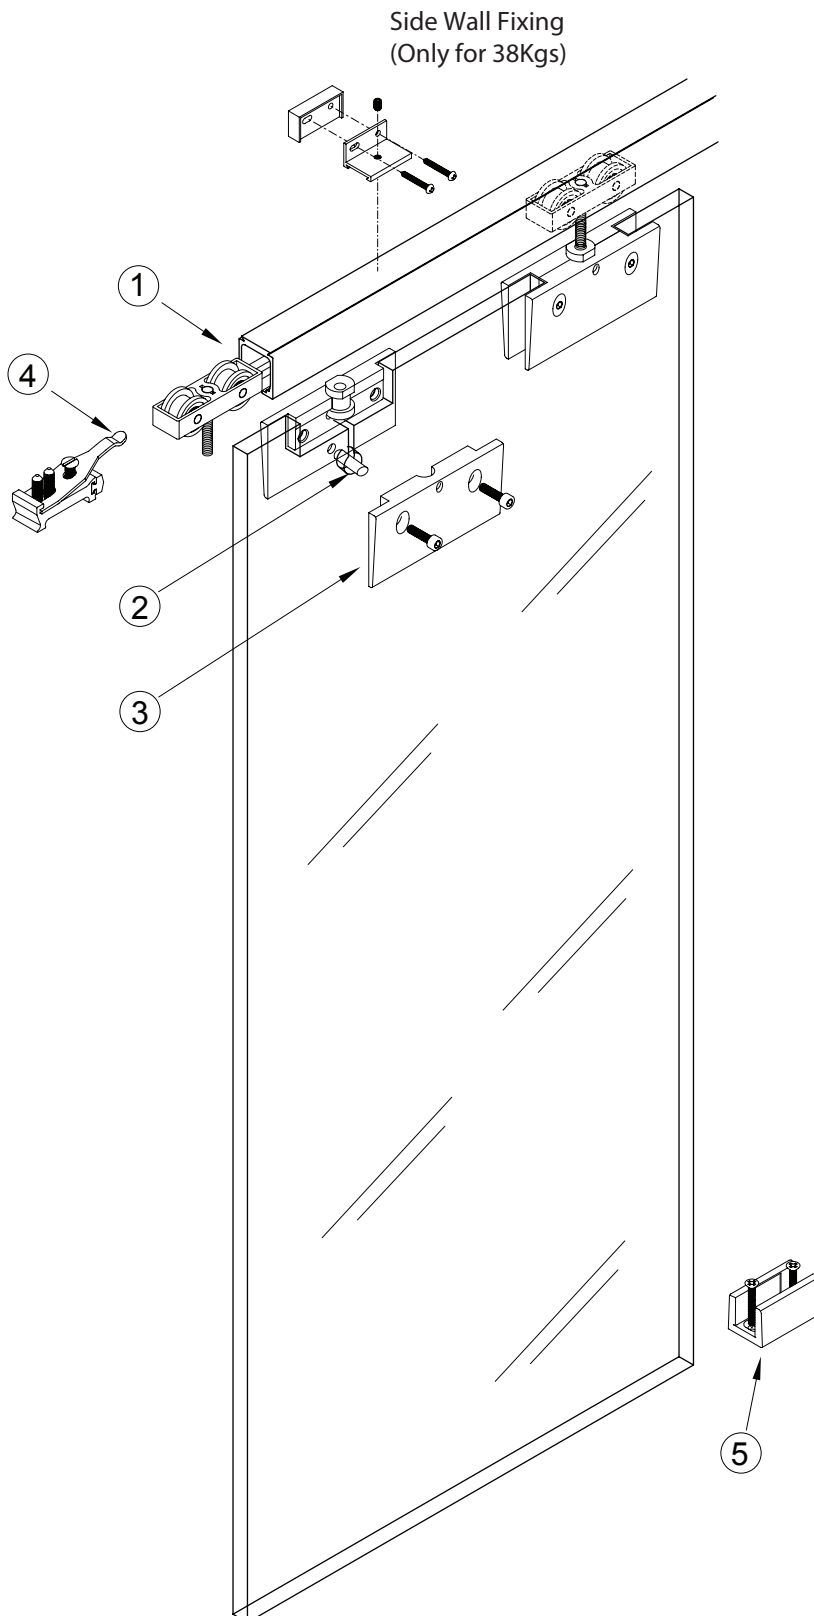


1. Install the track and insert the hangers.

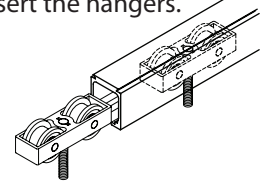


2. Align the glass and insert the pin.

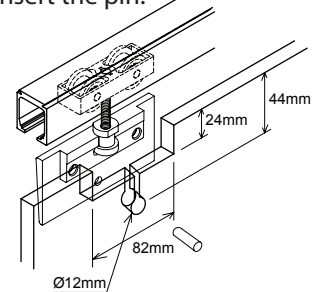


3. Fix the big screw first, adjust the height level, then fix the small screw.

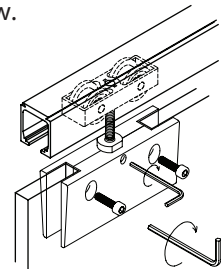

4. Install and adjust the door stopper/ holder.



5. Install the floor guides.



GLASS DOOR LOCKS

PF-112

Non-Cutting Glass Door Lock - Inside with Thumbturn

Finishes : F21, F22, F91, F93, F94, F96, F97

Material : Zinc Alloy

Rubber : 1 Thick Rubber Liner
on each Side

Door Thickness : 8-10mm



Inside



Outside

PF-115

Make Cutting Glass Door Lock - Outside with Emergency Release - Inside with Thumbturn

Finishes : F21, F22

Material : Zinc Alloy

Rubber : 1 Thick Rubber Liner on each Side

Door Thickness : 8-10mm



Inside



Outside

PF-117

Non-Cutting Glass Door Lock - Inside with Thumbturn

Finishes : F21, F22, F91, F93, F94, F96, F97

Material : Zinc Alloy

Rubber : 1 Thick Rubber Liner on each Side

Door Thickness : 8-10mm



Inside



Outside

PF-118

Make Cutting Glass Door Lock - Outside with emergency release - Inside with Thumbturn

Finishes : F21, F22

Material : Zinc Alloy

Rubber : 1 Thick Rubber Liner on each Side

Door Thickness : 8-10mm



Inside



Outside

GLASS DOOR LOCKS

Dimensions
in millimeters




A Type




B Type




C Type

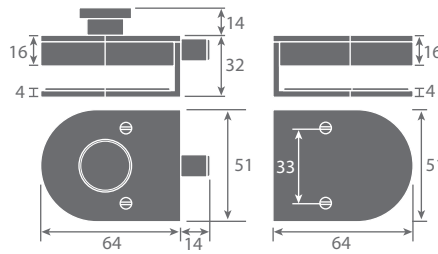


PF-112-A

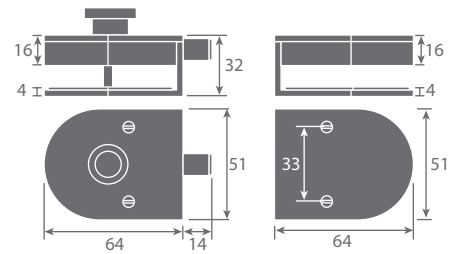


PF-115-A

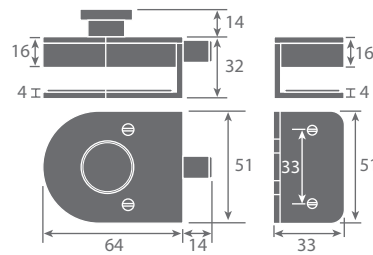


PF-112-B

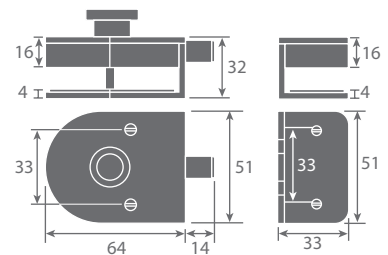

PF-115-B

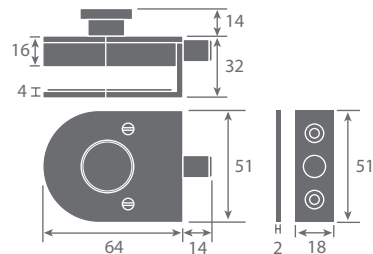

PF-112-C

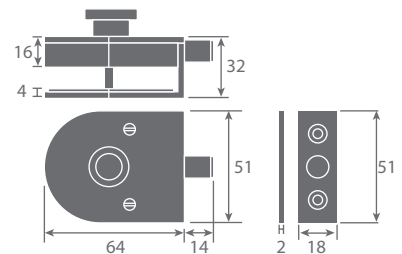


PF-115-C




A Type




C Type

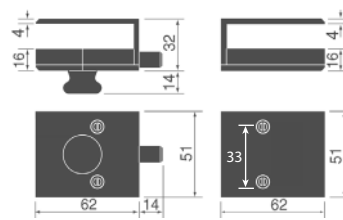


PF-117-A

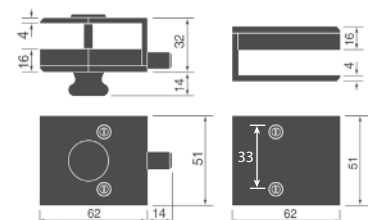

PF-118-A

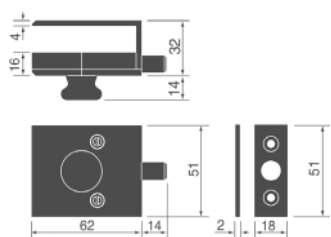

PF-117-C

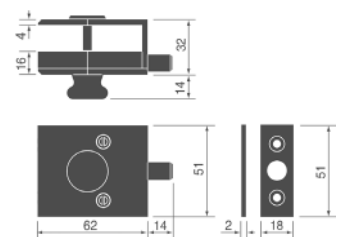

PF-118-C

GLASS SLIDING DOOR LOCKS

PF-116-05

Make Cutting Glass Door Lock - Outside with Key - Inside with Thumbturn

Finishes : F91, F93, F94, F96, F97
Material : Zinc Alloy
Rubber : 1 Thick Rubber Liner on each Side
Door Thickness : 12-15mm
Door Hand : LH or RH



Inside



Outside

PF-116-15

Flush Pull

Finishes : F91, F93, F94, F96, F97
Material : Zinc Alloy
Rubber : 1 Thick Rubber Liner on each Side
Door Thickness : 12-15mm



Inside



Outside

PF-116-35

Make Cutting Glass Door Lock - Outside with Key

Finishes : F91, F93, F94, F96, F97
Material : Zinc Alloy
Rubber : 1 Thick Rubber Liner on each Side
Door Thickness : 12-15mm
Door Hand : LH or RH



Inside



Outside

PF-116-63

Make Cutting Glass Door Lock - Inside with thumbturn

Finishes : F91, F93, F94, F96, F97
Material : Zinc Alloy
Rubber : 1 Thick Rubber Liner on each Side
Door Thickness : 12-15mm
Door Hand : LH or RH



Inside




Outside

PF-116-65

Make Cutting Glass Door Lock - Outside with Emergency Release - Inside with Thumbturn

Finishes : F91, F93, F94, F96, F97
Material : Zinc Alloy
Rubber : 1 Thick Rubber Liner on each Side
Door Thickness : 12-15mm
Door Hand : LH or RH



Inside



Outside

PF-116-68

Make Cutting Glass Door Lock - Outside with Emergency Release - Inside with Thumbturn

Finishes : F91, F93, F94, F96, F97
Material : Zinc Alloy
Rubber : 1 Thick Rubber Liner on each Side
Door Thickness : 12-15mm
Door Hand : LH or RH



Inside



Outside

GLASS SLIDING DOOR LOCKS


Dimensions
in millimeters




A Type




C Type

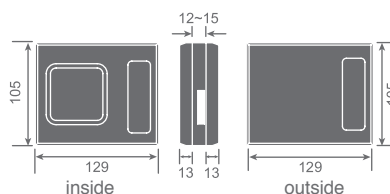


A Type




C Type

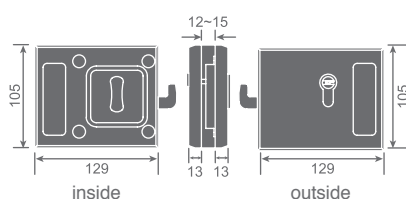


PF-116-05-RH

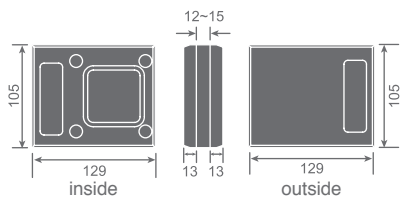


PF-116-15

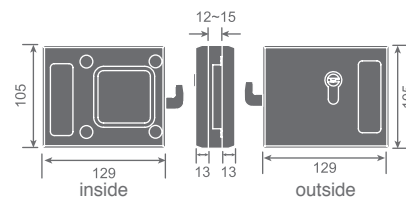


PF-116-35-RH

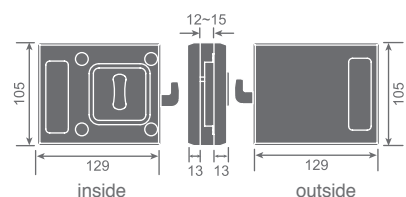

PF-116-63-RH

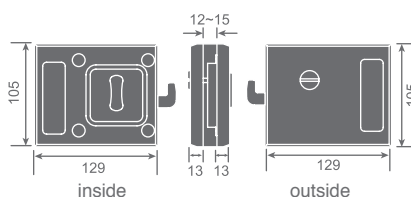

PF-116-65-RH

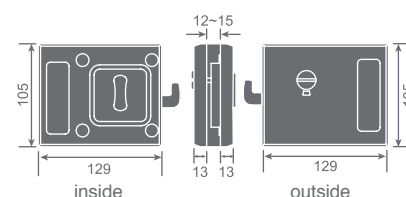

PF-116-68-RH


A Type



8 - 10mm

B Type

(only for PF112, PF115)

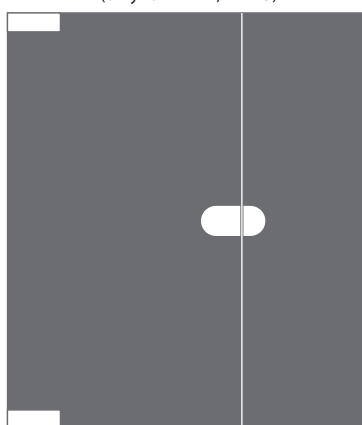

8 - 10mm

C Type



6 - 8mm

Model No	Operations
PF112 / PF116-63 / PF117	Lock & unlock by thumbturn inside only.
PF115 / PF116-68 / PF118	Lock & unlock by thumbturn inside and emergency by coin from outside with indicator.
PF-116-05	Lock & unlock by Key outside, or by thumbturn inside.
PF-116-35	Lock & unlock by Key outside only.
PF-116-65	Lock & unlock by thumbturn inside and emergency by coin from outside

NEW

**GHA-N2 SERIES
SHOWER
DOOR HINGES
(60KGS)**

GHA-01-N2 (90°)

Shower Door Hinges

Wall to Glass 90°

Finishes : F16, F21, F22, F91,
F93, F94, F96, F97

Material : Forged Brass



GHA-01A-N2 (90°)

Shower Door Hinges

Wall to Glass 90°

Finishes : F16, F21, F22, F91,
F93, F94, F96, F97

Material : Forged Brass



GHA-01F (90°)

Shower Glass Panel Support

Wall to Glass 90°

Finishes : F16, F21, F22, F91,
F93, F94, F96, F97

Material : Forged Brass



GHA-02-N2 (90°)

Shower Door Hinges

Glass to Glass 90°

Finishes : F16, F21, F22, F91, F93, F94, F96, F97

Material : Forged Brass



GHA-04-N2 (135°)

Shower Door Hinges

Glass to Glass 135°

Finishes : F16, F21, F22, F91, F93, F94, F96, F97

Material : Forged Brass



GHA-05-N2 (180°)

Shower Door Hinges

Glass to Glass 180°

Finishes : F16, F21, F22, F91, F93, F94, F96, F97



Material : Forged Brass




GHA-N2 SERIES SHOWER DOOR HINGES (60KGS)

Dimensions in millimeters


N2 is enhanced with an anti-collision protector against wear from normal usage

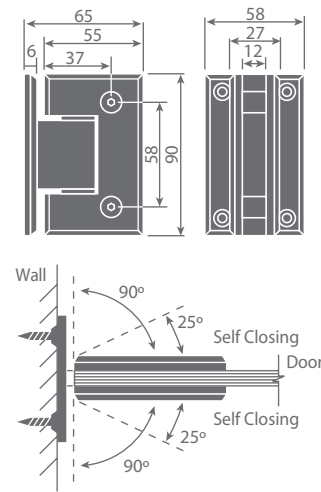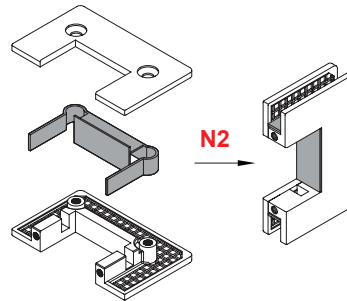


GHA-01-N2 (90°)

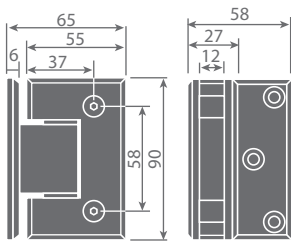






GHA-01A-N2 (90°)

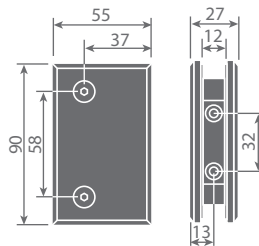



GHA-01F (90°)

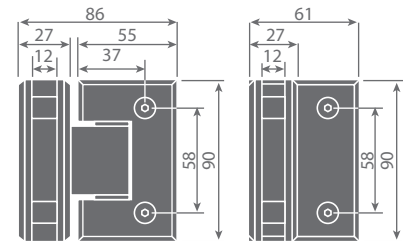

GHA-02-N2 (90°)

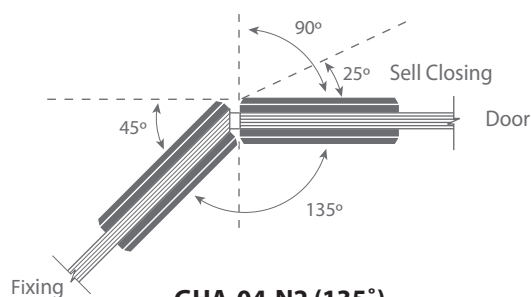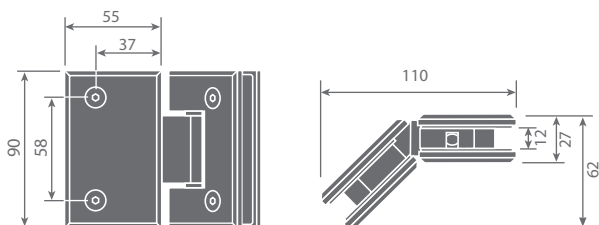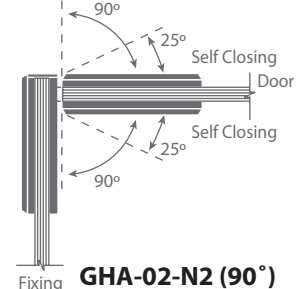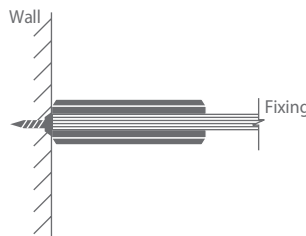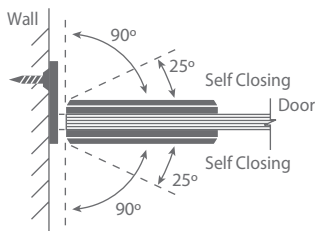

GHA-04-N2 (135°)
Weight for 55 kgs ONLY

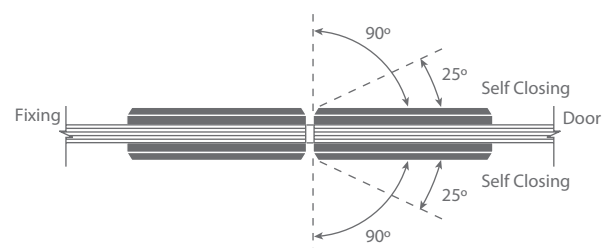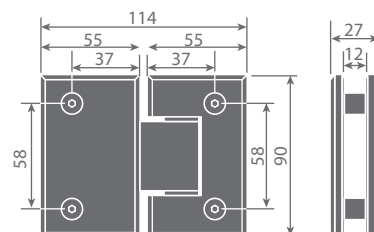

GHA-05-N2 (180°)

NEW

**GHC-N2 SERIES
SHOWER
DOOR HINGES
(45KGS)**

GHC-01-N2 (90°)

Shower Door Hinges

Wall to Glass 90°

Finishes : F16, F21, F22, F91, F93, F94, F96, F97

Material : Forged Brass



GHC-01A-N2 (90°)

Shower Door Hinges

Wall to Glass 90°

Finishes : F16, F21, F22, F91, F93, F94, F96, F97

Material : Forged Brass



GHC-01F (90°)

Shower Glass Panel Support

Wall to Glass 90°

Finishes : F16, F21, F22, F91, F93, F94, F96, F97

Material : Forged Brass



GHC-04-N2 (135°)

Shower Door Hinges

Glass to Glass 135°

Finishes : F16, F21, F22, F91, F93, F94, F96, F97

Material : Forged Brass

Weight For: **40 kgs ONLY**



GHC-05-N2 (180°)

Shower Door Hinges

Glass to Glass 180°

Finishes : F16, F21, F22, F91, F93, F94, F96, F97



Material : Forged Brass




GHC-N2 SERIES SHOWER DOOR HINGES (45KGS)

Dimensions in millimeters


N2 is enhanced with an anti-collision protector against wear from normal usage

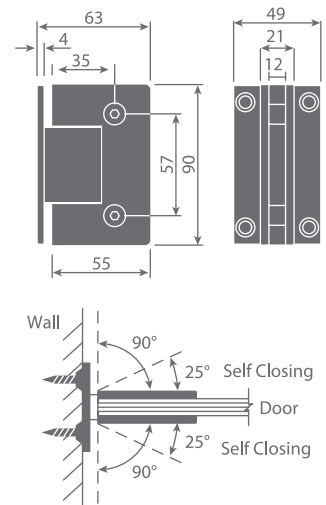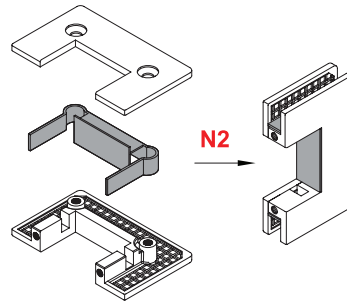


GHC-01-N2 (90°)

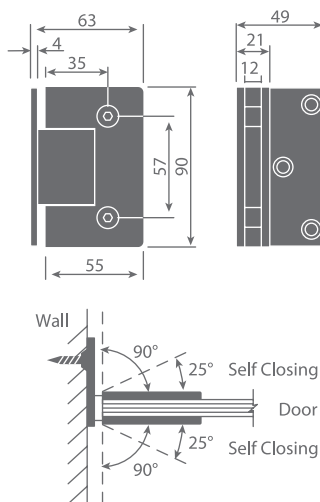

GHC-01A-N2 (90°)

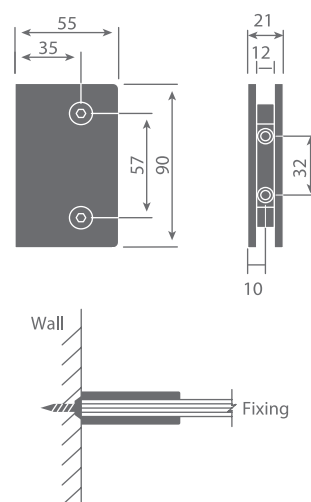


GHC-01F (90°)

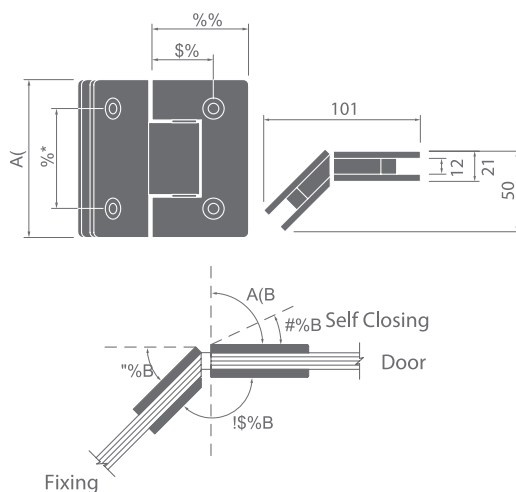

GHC-04-N2 (135°)

Weight for 40 kgs ONLY

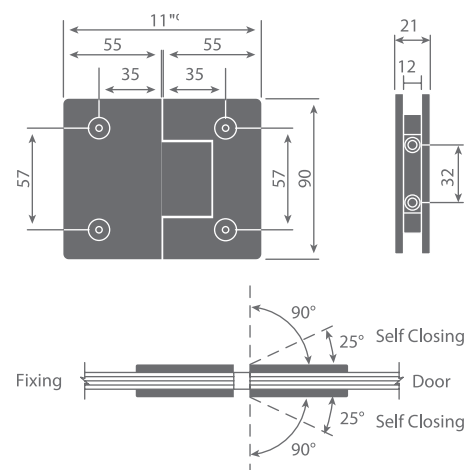


GHC-05-N2 (180°)


Calculating Glass Sizes

Width for Glass-to-Glass Hinges


90° Glass-to-Glass Hinges with Square Cut Door and panel

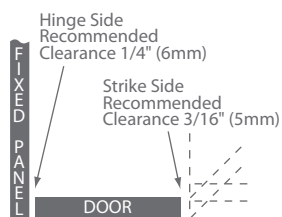


135° Glass-to-Glass Hinges with Square Cut Door and 45° Miter Joint Panel

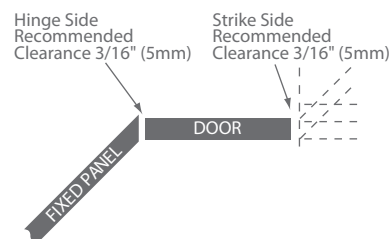


180° Glass-to-Glass Hinges with Square Cut Door and panel

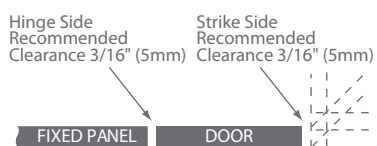


"Rubber Cushion" Collision-Free Against the Cutout of the Glass Door

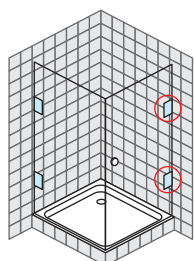


**GHA-01
GHC-01
GHE-01**

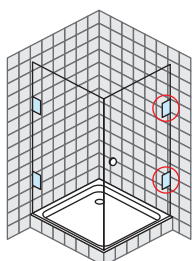


**GHA-01A
GHC-01A**

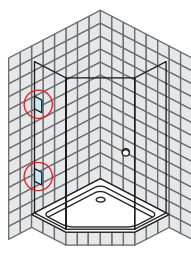


**GHA-01F
GHC-01F**

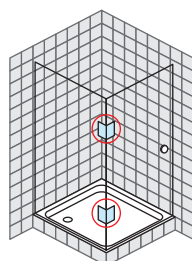

GHA-02

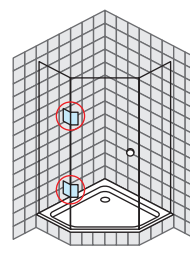

**GHA-04
GHC-04**

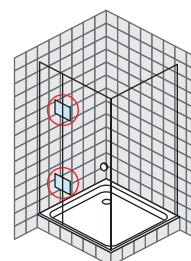

**GHA-05
GHC-05
GHE-05**

Thickness of Glass : For 8-12mm Glass

Material : Solid Brass

Screws : Stainless Steel

Door Weight : GHA maximum weight of **60kg**
GHC and GHE maximum weight of **45kg**
(*Please note 04 design maximum weight is 40kg) and a maximum width of 750mm FOR ALL MODELS.

Gaskets Rubber : For 8mm use 1mm + 2mm (Thick Rubber Liners on Each Side)
For 10mm use 2mm (Thick Rubber Liners on Each Side)
For 12mm use 1mm (Thick Rubber Liners on Each Side)

- Only Tempered or Safety Glass are recommended.
- Do not use Power Tools in Assembling or Mounting these Hinges.
- 40,000 cycles tested.
- All hinges are equipped with double action spring from 0° to 180° with automatic return to centre,(Self-Centering) at approx 25° each side. **Except GHE.**

Deduction for Vinyl Vertical Seals:

Wall-Glass 90°



Glass-Glass 90°



Glass-Glass 135°



Glass-Glass 180°



GHE Series

NEW

Shower door hinges

Material : Forged Brass

Door Thickness : 8-12mm

Door Handing : Left Hand (LH)/

Right Hand (RH)

Door Weight : maximum weight of 45kg



Door Width : maximum width of 750mm

Note : 1. No spring function

2. Specifically designed for 1

continuous piece of vinyl water seal

Dimensions in mm

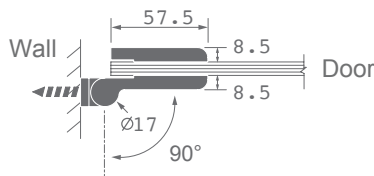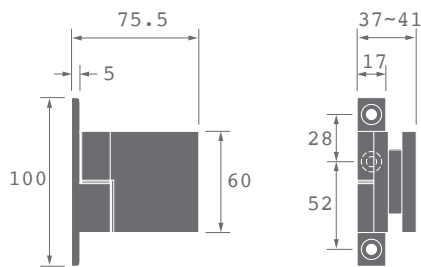


GHE-01-RH (90°)

Wall to Glass Door 90°


Finishes: F21, F91, F93, F94, F96, F97




* The glass door can be removed by simply lifting the door with the hinge pin out of the socket.

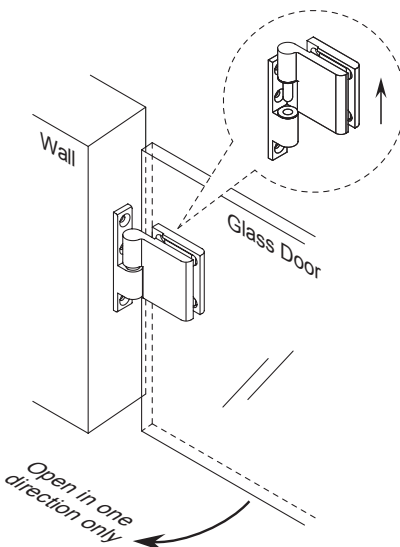

GHE-01-LH

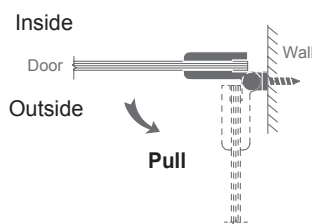


Left Hand (LH) Outswing

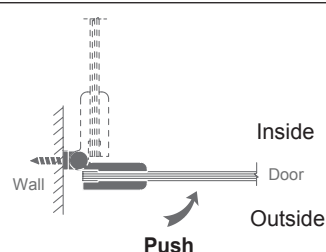


Left Hand (LH) Inswing

GHE-01-RH

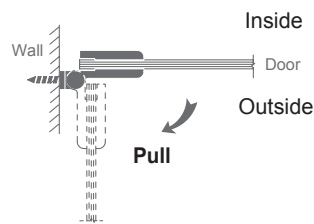

Right Hand (RH) Outswing

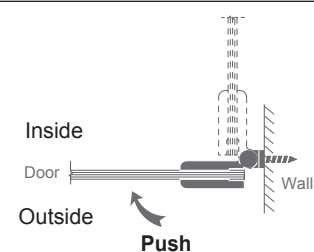

Right Hand (RH) Inswing

GHE-01-RH

Hinges allow door to open in one direction only:

When GHE-01-RH is installed to your left, the door opens via pulling.

When GHE-01-RH is installed to your right, the door opens via pushing.

Note: The above is reversed for GHE-01-LH.



GHE Series NEW

Shower door hinges


Material : Forged Brass
Door Thickness : 8-12mm
Door Handing : Left Hand (LH)/
Right Hnad (RH)
Door Weight : maximum weight of 45kg
Door Width : maximum width of 750mm
Note : 1. No spring function
2. Specifically designed for 1
cotinuuous piece of vinyl water seal
Dimensions in mm

GHE-05-RH (180°)

Glass to Glass Door 180°
Finishes: F21, F91, F93, F94, F96, F97

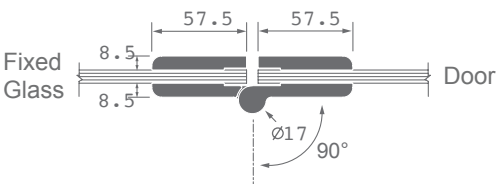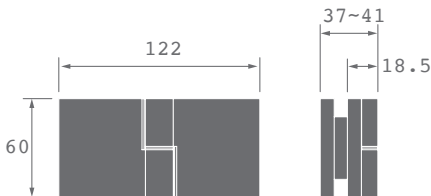

* The glass door can be removed by simply lifting the door with the hinge pin out of the socket.

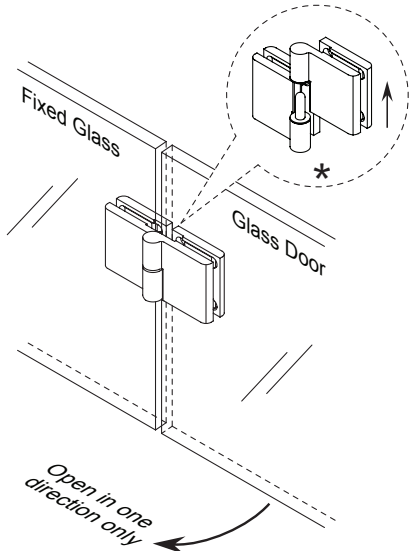

GHE-05-LH	GHE-05-RH
Inside Door Fixed Glass Outside Pull Left Hand (LH) Outswing	Fixed Glass Door Inside Outside Pull Right Hand (RH) Outswing
Fixed Glass Door Inside Outside Push Left Hand (LH) Inswing	Inside Door Fixed Glass Outside Push Right Hand (RH) Inswing

GHE-05-RH

Hinges allow door to open in one direction only:
When GHE-01-RH is installed to your left, the door opens via pulling.
When GHE-01-RH is installed to your right, the door opens via pushing.

Note: The above is reversed for GHE-05-LH.

HEADER PANEL SUPPORT BARS

Bracket Finishes : F21 F22 F91 F93 F94 F96 F97
 Bar Finishes : F24, F25 Only
 Thickness : For 8 -12mm Glass
 Material : Brass
 Screws : Stainless steel
 Rubber : 1 Thick Rubber Liner on Each Side
 Size : $\phi 19$ mm Diameter Tubular Bar
 Bar Length : 300, 600, 900, 1200mm
 No Hole Drilling Required


GS-072

Adjustable Door Stopper



GT-201

Bracket

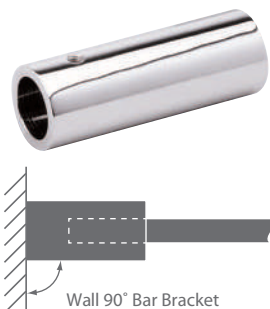

GT-202

Bracket




GT-203

Bracket



HEADER PANEL SUPPORT BARS


Dimensions
in millimeters

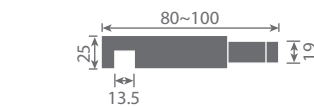


GS-072




GT-201-203

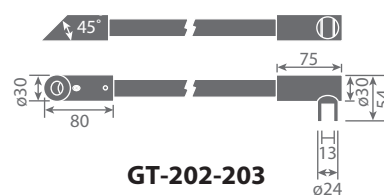


GT-202-203

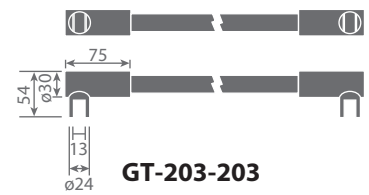

GT-203-203

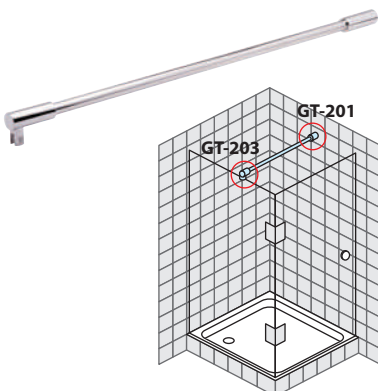

GT-201-203

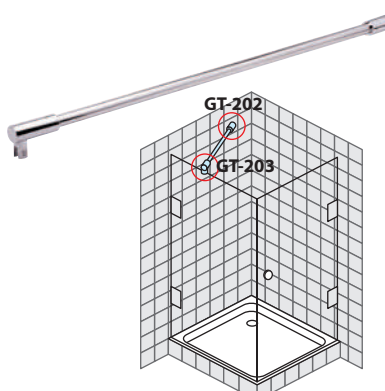


GT-202-203



GT-203-203

TOWEL BARS WITH PULL KNOB

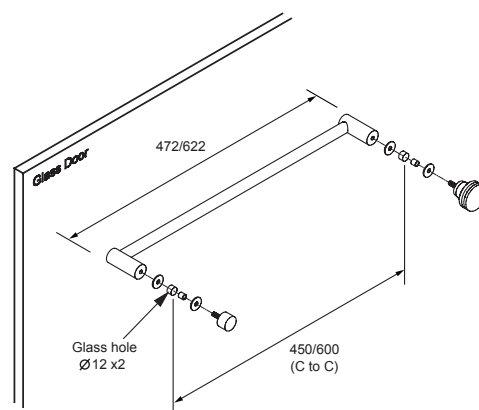

GT-101/GT-101M

Finishes : F21, F91, F93, F94, F96, F97

Material : (GT-101) Brass & S/S; (GT-101M) Zinc Alloy & Stainless Steel

Rubber : 1 Thick Rubber Liner on Each Side

Size : ø16mm Diameter Tubular Bar

Fixing Method : X, L, Y Type



GT-104-L



Finishes : F21, F91, F93, F94, F96, F97

Material : Brass & Stainless Steel

Rubber : 1 Thick Rubber Liner on Each Side

Size : $\varnothing 9.5$ mm Diameter Bar

Fixing Method : L, Y Type

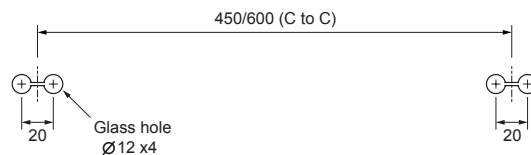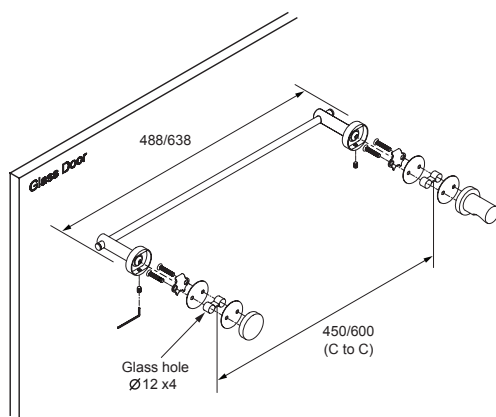

GT-108

Finishes : F21, F91, F93, F94, F96, F97

Material : Zinc

Rubber : 1 Thick Rubber Liner on Each Side

Size : 22 x 14mm Tubular Bar

Fixing Method : X, L, Y, D Type




GT-108-X



GT-108-L




GT-108-Y

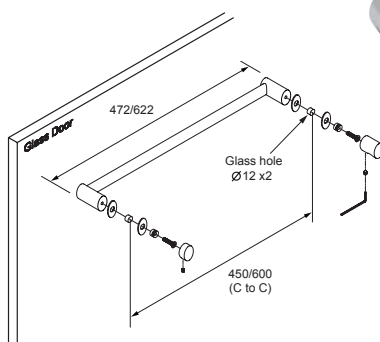

NEW GT-108-D

TOWEL BARS
WITH
PULL KNOB

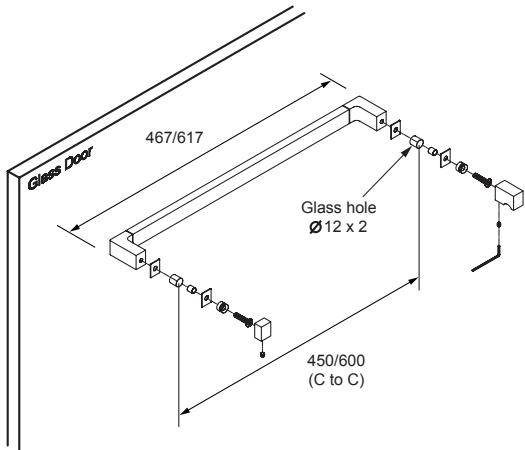

GT-109

Finishes : F21, F91, F93, F94, F96, F97
Material : Zinc Alloy & Brass
Rubber : 1 Thick Rubber Liner on Each Side
Size : 22 x 12mm Tubular Bar
Fixing Method : X , L , Y , D Type



GT-109-X



GT-109-L



GT-109B-L



GT-109-Y



NEW

GT-109-D

or



NEW

GT-109B-D

GT-110

Finishes : F21, F91, F93, F94, F96, F97

Material : Zinc Alloy & Brass

Rubber : 1 Thick Rubber Liner on Each Side

Size : 22 x 14mm Tubular Bar

Fixing Method : X, L, Y, D Type




GT-110-X



GT-110-L



GT-110-Y

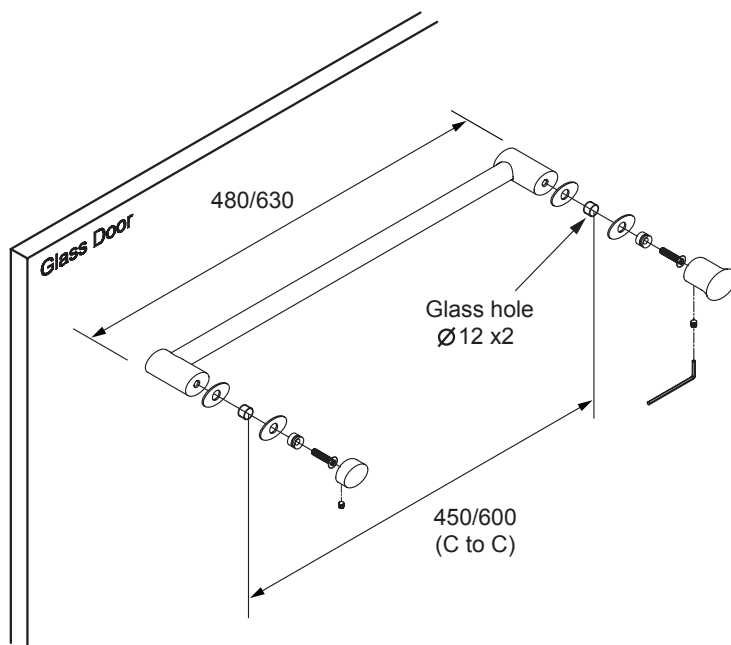

NEW

GT-110-D

GT-111

Finishes : F21, F91, F93, F94, F96, F97
Material : Zinc Alloy & Brass
Rubber : 1 Thick Rubber Liner on Each Side
Size : 22 x 12mm Tubular Bar
Fixing Method : X , L , Y, D Type



GT-111-X




GT-111-L



GT-111C-L



GT-111-Y

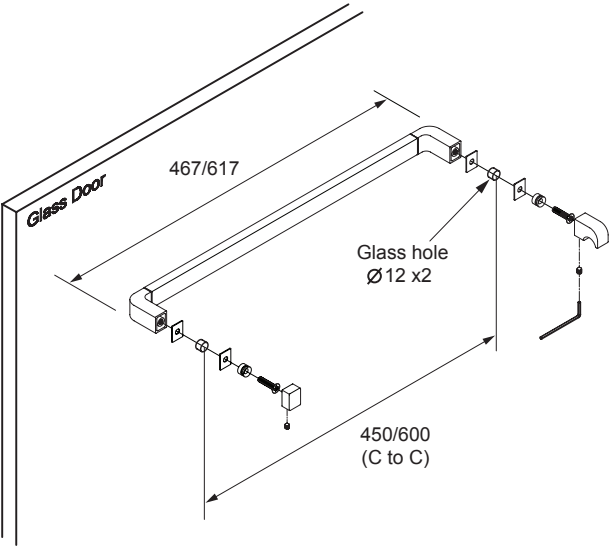

GT-111-D

or



GT-111C-D

GT-112


NEW

Finishes : F21, F91, F93, F94, F96, F97

Material : Aluminium & Zinc Alloy

Rubber : 1mm Thick Rubber Liner on Each Side

Fixing Method : X , L , Y, D Type

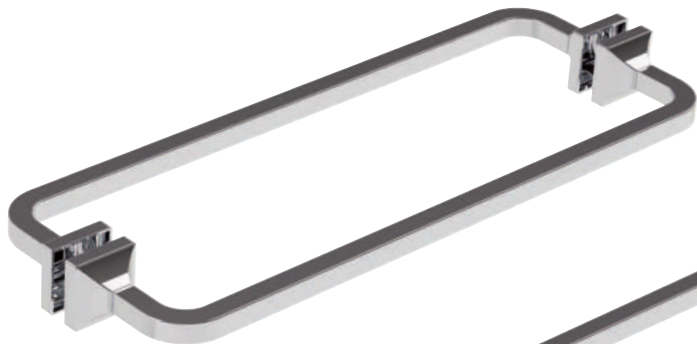


GT-112-X



GT-112-L



GT-112-Y

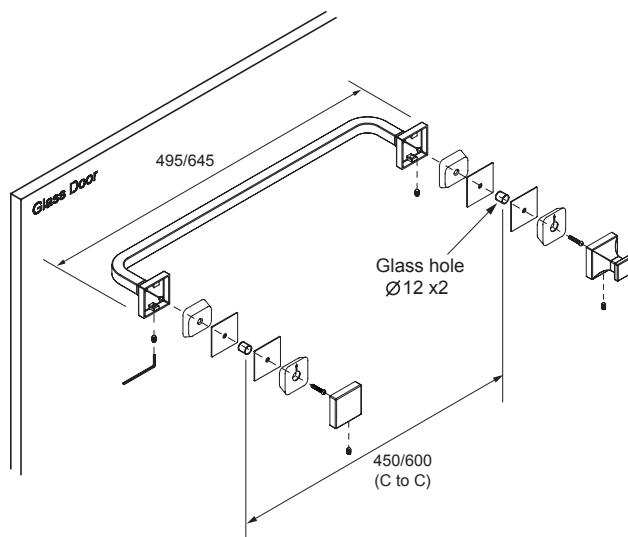

GT-112-D

GT-113

NEW

Finishes : F21, F91, F93, F94, F96, F97

Material : Aluminium

Rubber : 1mm Thick Rubber Liner on Each Side

Fixing Method : X , L , Y, D Type




GT-113-X



GT-113-L



GT-113-Y

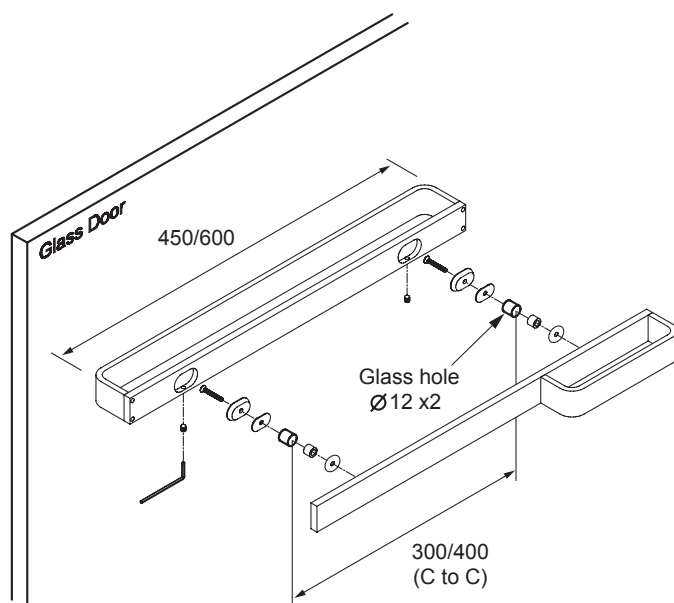


GT-113-D

Only GT-113-D Material: Zinc Alloy

GT-114 NEW

Finishes : F21 F91-F97 F21, F91, F93, F94, F96, F97
 Material : Zinc Alloy & Brass
 Rubber : 1mm Thick Rubber Liner on Each Side
 Fixing Method : X , L , Y, D Type

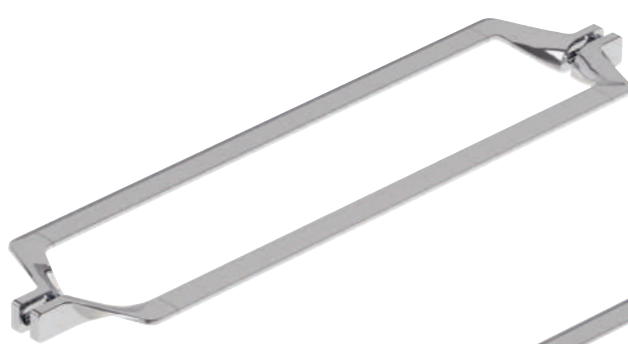


GT-114-X




GT-114-L-LH



GT-114-Y

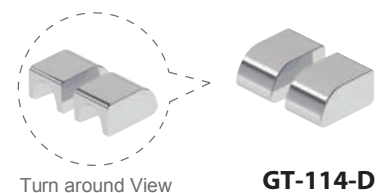


GT-114-D

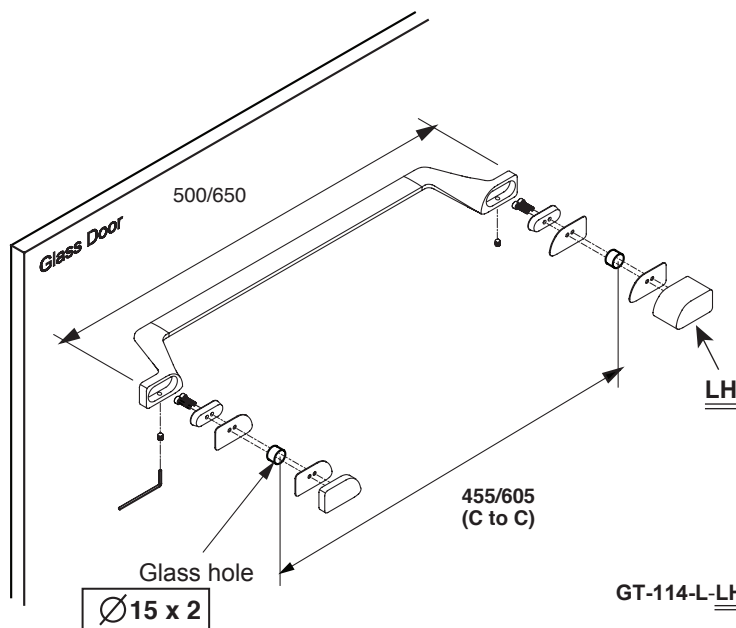

GT-114-L-LH

GT-114-L-RH

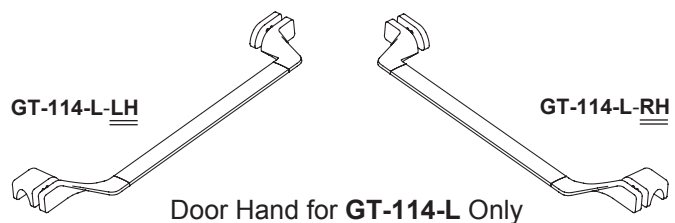

GT-115



NEW

Finishes : F21, F91, F93, F94, F96, F97

Material : Aluminium

Rubber : 1mm Thick Rubber Liner on Each Side


Fixing Method : X , L , Y, D Type

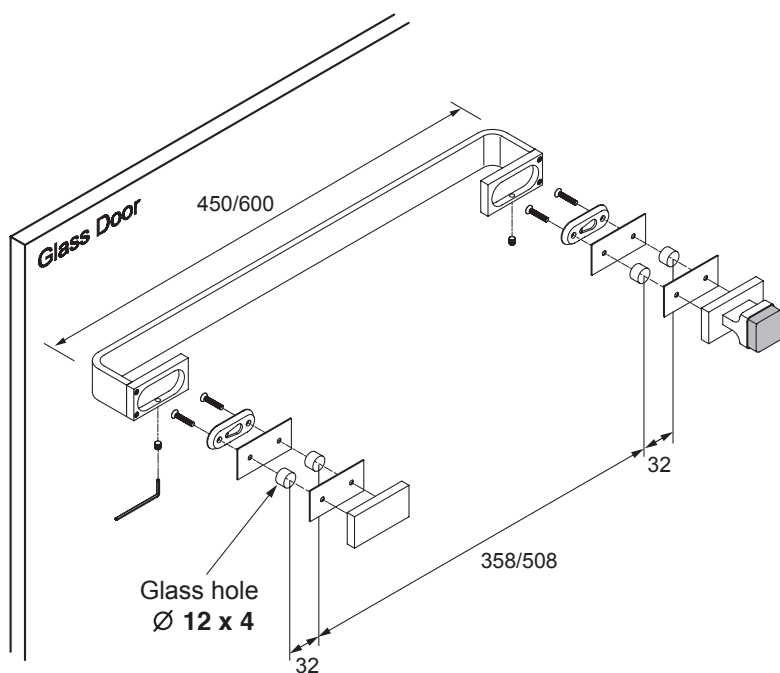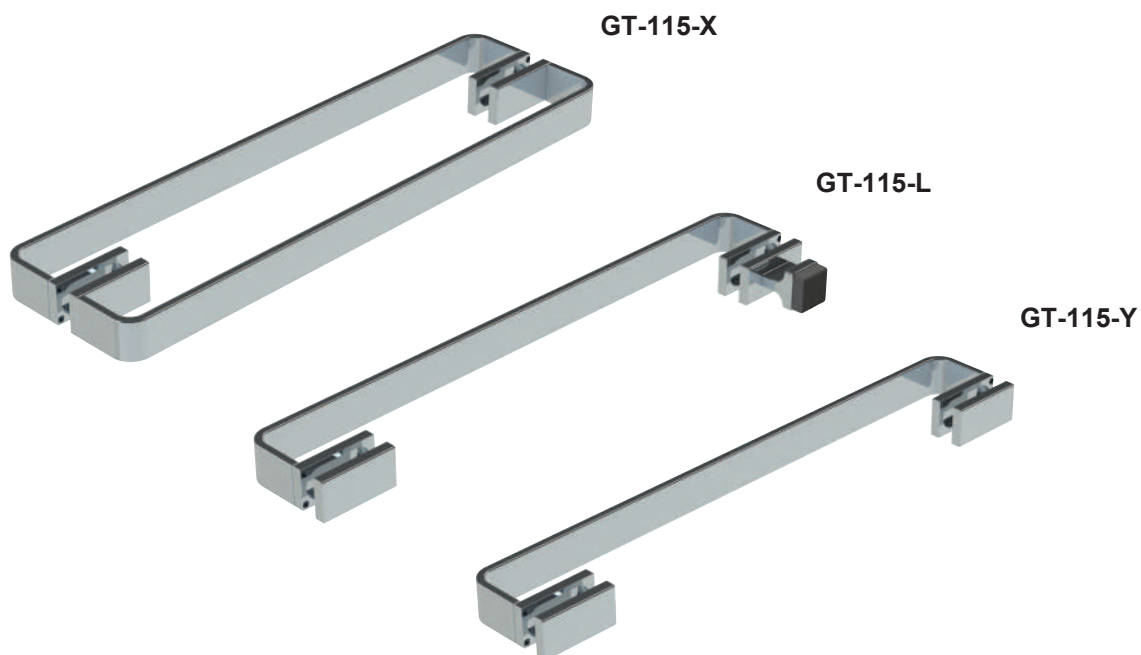


GT-115-D

TOWEL BARS WITH PULL KNOB


Dimensions
in millimeters

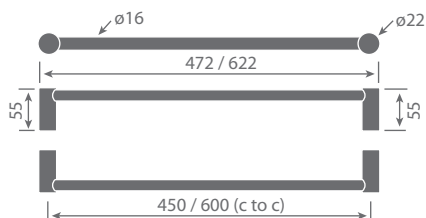


GT-101-X / GT-101M-X

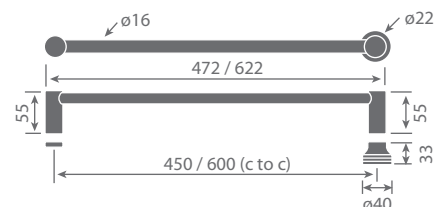


GT-101-L / GT-101M-L

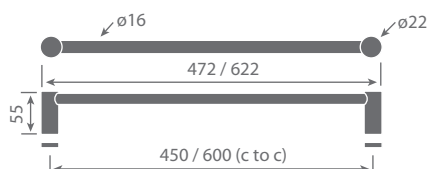


GT-101-Y / GT-101M-Y

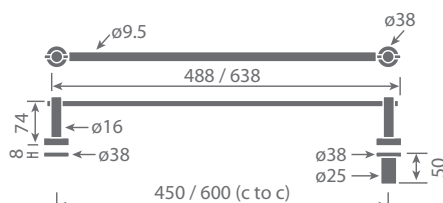


GT-104-L

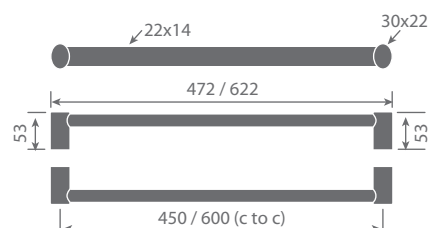

GT-108-X

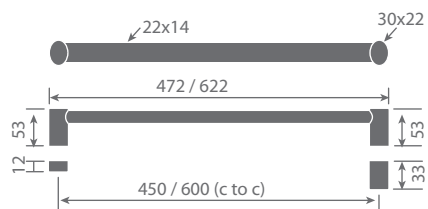


GT-108-L

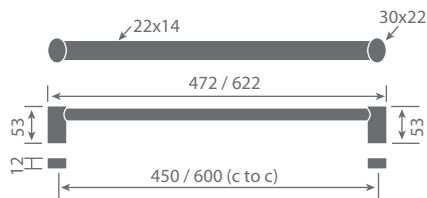


GT-108-Y




GT-108-D

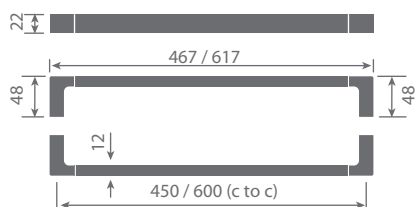


GT-109-X

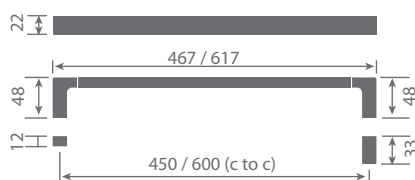

GT-109-L

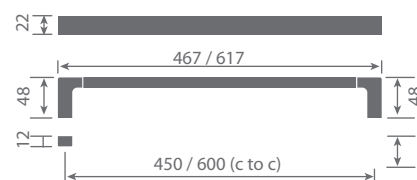

GT-109B-L

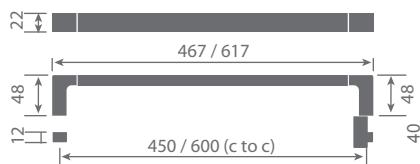

GT-109-Y




GT-109-D




GT-109B-D

TOWEL BARS WITH PULL KNOB


Dimensions
in millimeters

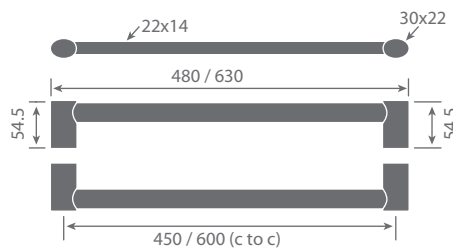

GT-110-X

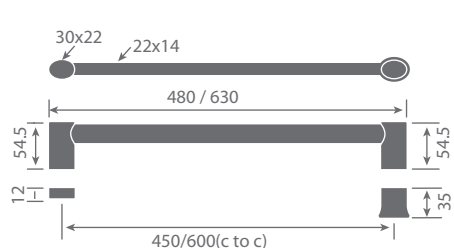


GT-110-L

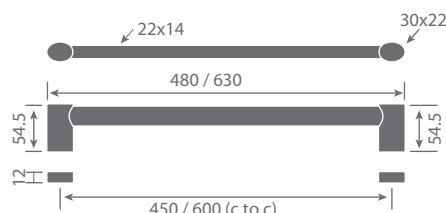


GT-110-Y




GT-110-D

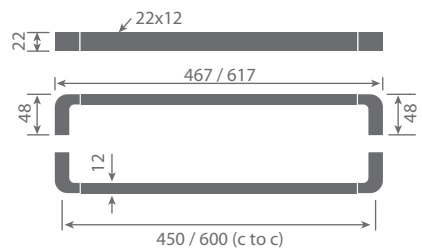


GT-111-X

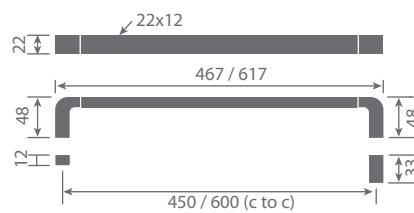

GT-111-L

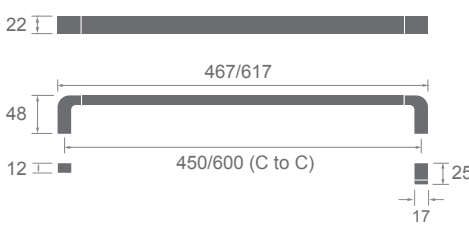

GT-111C-L

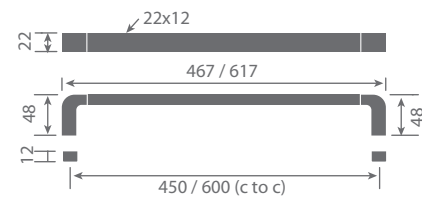


GT-111-Y




GT-111-D




GT-111C-D

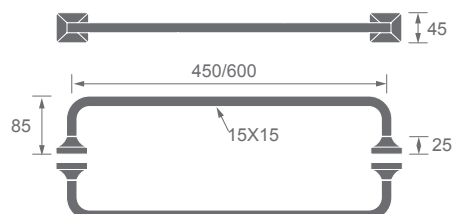

GT-112-X

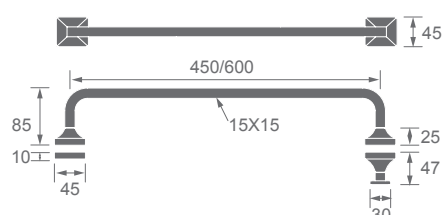


GT-112-L

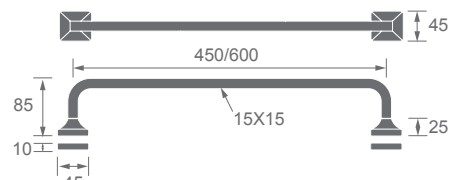


GT-112-Y




GT-112-D

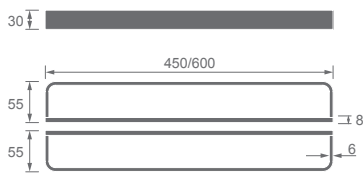

GT-113-X

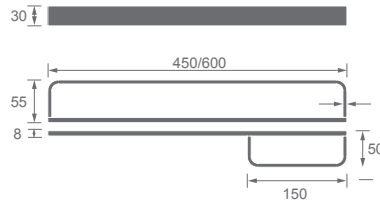


GT-113-L

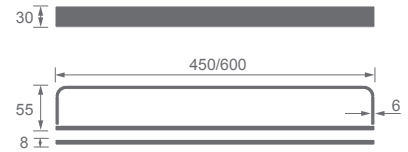


GT-113-Y




GT-113-D

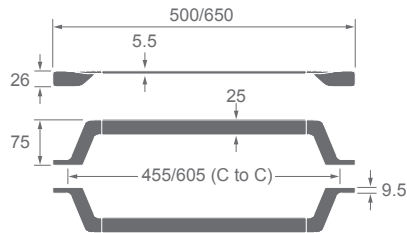

GT-114-X

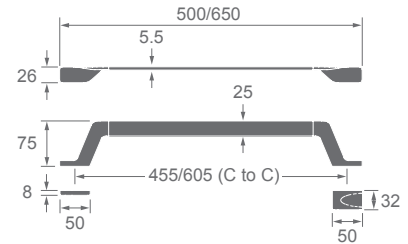


GT-114-LH

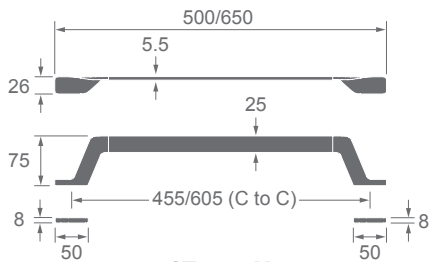


GT-114-Y




GT-114-D

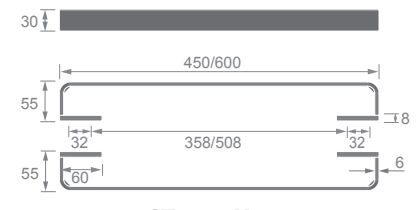


GT-115-X

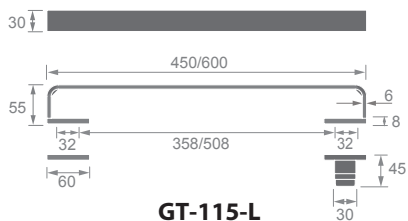

GT-115-L

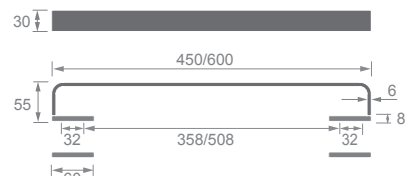


GT-115-Y

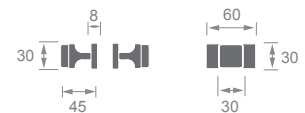


GT-115-D

Towel Bars


SITUATION : TOWEL BAR HITS WALL BEFORE DOOR IS FULLY OPEN.

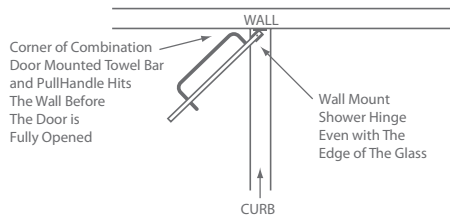


SITUATION : USE GLASS TO GLASS SHOWER HINGE : INSET FAR ENOUGH FROM THE EDGE OF THE GLASS TO CLEAR TOWEL BAR.

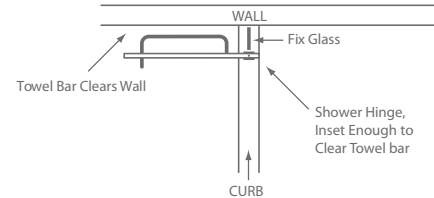

SITUATION : DOOR HITS TOWEL BAR BEFORE OPENING 90°

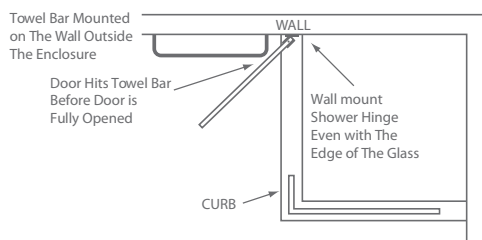

SITUATION : USE GLASS TO GLASS SHOWER HINGE : INSET FROM THE EDGE OF THE GLASS FAR ENOUGH TO CLEAR TOWEL BAR

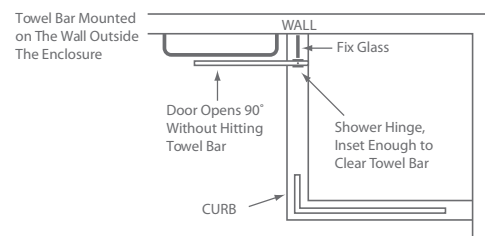

TOWEL BARS WITH PULL HANDLE

CH-SG-A

Towel Bar with Pull Handle

Finishes : F24, F25, F91, F93, F94, F96, F97

Material : Stainless Steel

Rubber : 1 Thick Rubber Liner on Each Side

Fixing Method : Y Type



SD-1-A

Towel Bar

Finishes : F24, F25, F91, F93, F94, F96, F97

Material : Stainless Steel


Rubber : 1 Thick Rubber Liner on Each Side

Fixing Method : X , Y Type




TOWEL BARS WITH PULL HANDLE


Dimensions
in millimeters

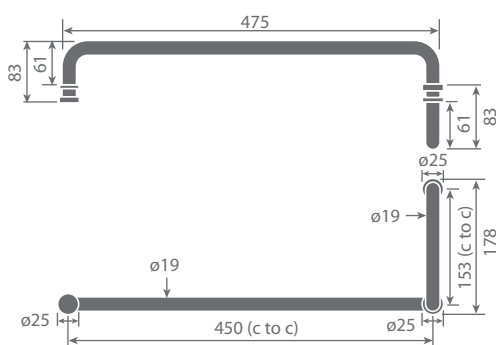

CH-SG-A Y Type

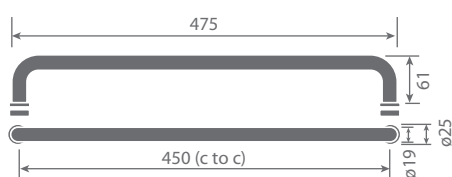

SD-1-A Y Type

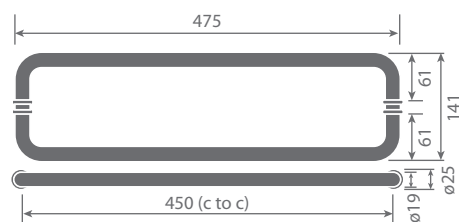

SD-1-A X Type

GHR SERIES GLASS HINGES

Finishes : F21, F22, F91, F93, F94, F96, F97
Material : Zinc Alloy
Screws : Stainless steel
Cycle Test : 40,000
Door Weight : 45kg
Door Width: Maximun width of 750mm
Door Thickness : 8-12mm Glass

GHR-01A (90°)



GHR-01B (90°)



GHR-01D (90°)





GHR-05 (180°)







GHR SERIES GLASS HINGES


Dimensions & Templates
in millimeters

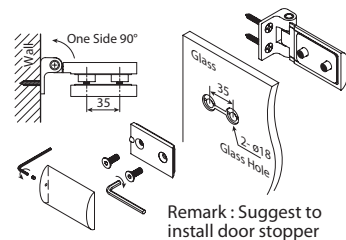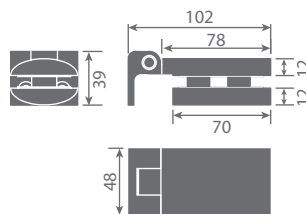


GHR-01A (90°)

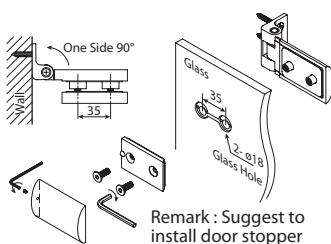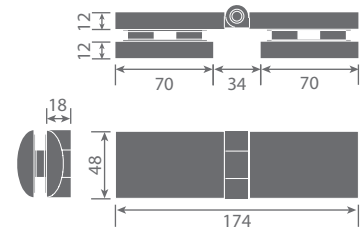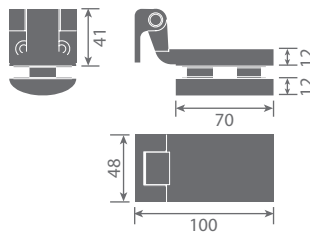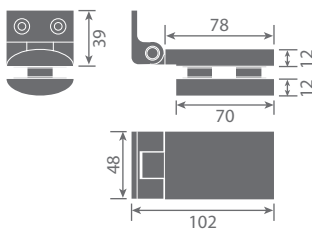

GHR-01B (90°)

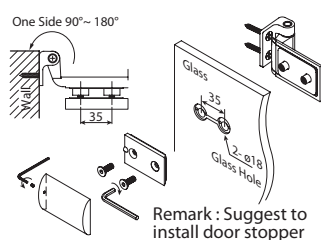

GHR-01D (90°)

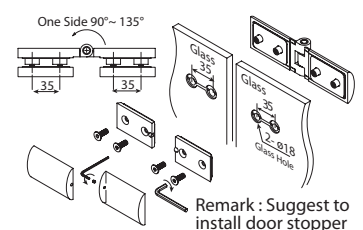

GHR-05 (180°)

GHL SERIES GLASS HINGES

Finishes : F21, F22, F91, F93,
F94, F96, F97

Material : Zinc Alloy

Screws : Stainless steel

Thickness of Glass : 6~8mm

Door Weight : 20kg Max

Door Wide : 600mm Max


Cycle Test : 20,000

GHL



GHL SERIES GLASS HINGES

Dimensions & Templates
in millimeters

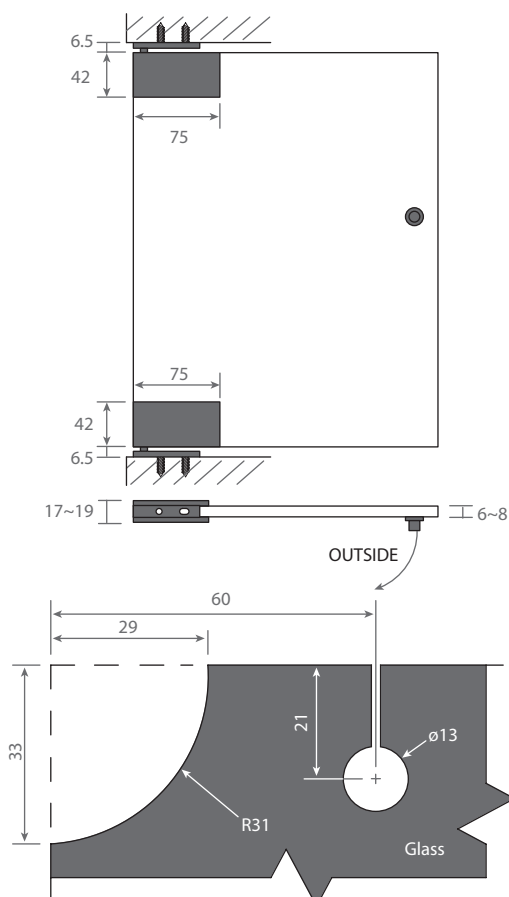

SHOWER DOOR VINYL WATER SEALS


With In-Lay Fins For
Anti-Slippery

For 10mm or 12mm Glass

WS-1N-10 / WS-1N-12

'Y' Inline Panel Seal for 90°


'Y' Inline Panel Seal is for use on 90° inline wall to glass applications. Snap onto the glass panel with the lip on the wall side. U portion PVC is rigid with single leg made of soft vinyl.

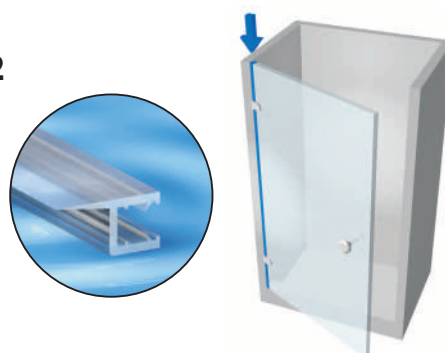

WS-2N-10 / WS-2N-12

Polycarbonate Door Jamb for 135°


This clear Polycarbonate is snapped onto the door on the hinge side to achieve a seal to the fixed panel in 135° neo-angle installations.

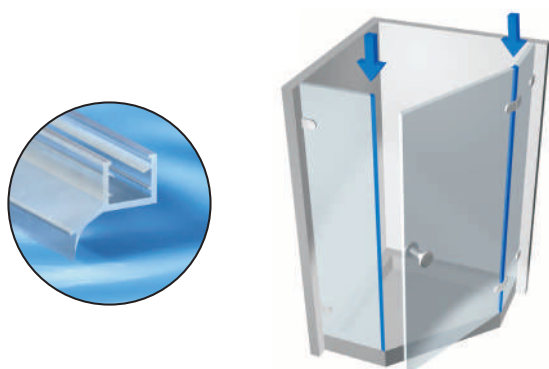

WS-3N-10 / WS-3N-12

Polycarbonate 'U' with Leg and Seal for 90°


This clear Polycarbonate is snapped onto the strike side fixed panel at a 90° angle from the door. Soft vinyl helps cushion door closure, and acts as stopper & seal to the door.

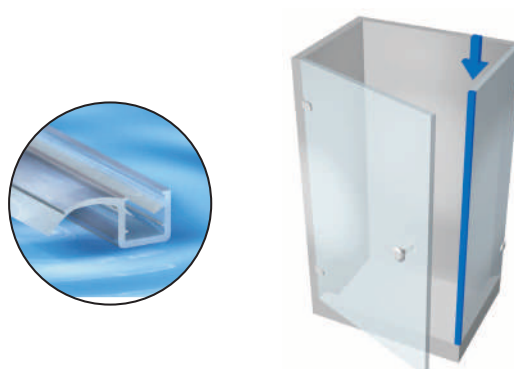

WS-4N-10 / WS-4N-12

Dual Durometer PVC Seal and Wipe


This clear Dual Durometer PVC Seal and Wipe has two uses : Snap it on door bottom and the soft lip acts as a wipe; snap it on an overlapping bi-fold door and the soft lip acts as a seal.

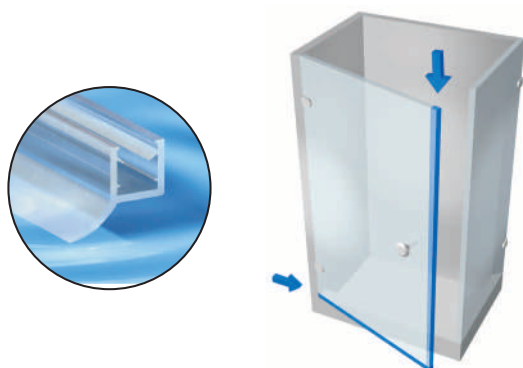

WS-5N-10 / WS-5N-12

Co-Extruded Clear Bottom Wipe with Drip Rail


This clear Bottom Wipe with Drip Rail snaps onto bottom of door. Soft wipes on bottom create a water tight seal. 45° Drip Rail sheds water back into the shower stall.

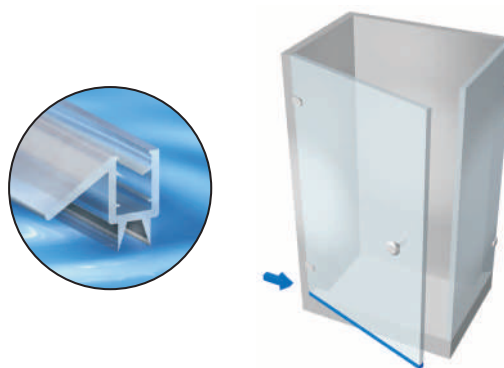

WS-6N-10 / WS-6N-12

Polycarbonate Bottom Rail with Wipe


This clear Polycarbonate Bottom Rail is snapped onto door bottom to achieve a seal & wipe.



WS-7N-10 / WS-7N-12

Polycarbonate 'h' Jamb for 180°


This clear Polycarbonate 'h' Jamb is for use on 180° inline glass-to-glass applications. Snap onto the fixed panel with the lip on the strike side, or onto the door with the lip on the hinge side.



WS-8N-10 / WS-1N-12

Magnetic Profiles 180°


- Provide Positive Door Closure
- Mix and Match Configurations to achieve desired result
- Made of Co-Extruded Material with Soft Magnetic Receiver



WS-9N-10 / WS-9N-12

Magnetic Profiles 90°

- Provide Positive Door Closure
- Mix and Match Configurations to achieve desired result
- Made of Co-Extruded Material with Soft Magnetic Receiver




WS-10N-10 / WS-10N-12

NEW


WS-10NL-10 / WS-10NL-12

Polycarbonate Bottom Rail with Bulb Seal
Thansleat Vinyl Bulb Seal Cad
Be Used on Inswing or Outwing Doors.




SHOWER DOOR VINYL WATER SEALS

Dimensions
in millimeters




WS-1N-10

WS-1N-12

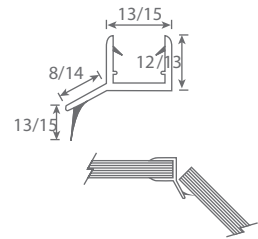


WS-2N-10

WS-2N-12




WS-3N-10

WS-3N-12




WS-4N-10

WS-4N-12




WS-5N-10

WS-5N-12



WS-6N-10

WS-6N-12




WS-7N-10

WS-7N-12




WS-8N-10

WS-8N-12



WS-9N-10


WS-9N-12



WS-10N-10

WS-10N-12

NEW



WS-10NL-10

WS-10NL-12

NEW

**EHB SERIES
GLASS TYPE
HANDLES**

Finishes :
F16, F21, F22, F91, F93, F94, F96, F97
Fixing Method : X Type

EHB-001-X



EHB-002-X



EHB-003-X




EHB-004-X



EHB-005-X



EHB-010-X



**EHB-016-01-X/
EHB-016-02-X**



**EHB-016A-01-X/
EHB-016A-02-X**



EHB-017-X



EHB-018-X



EHB-019-X **NEW**



EHB-020-X **NEW**




EHB-021-X **NEW**




EHB SERIES GLASS TYPE HANDLES


Dimensions
in millimeters




EHB-001-X




EHB-002-X




EHB-003-X




EHB-004-X



EHB-005-X




EHB-010-X




EHB-016-01-X




EHB-016A-01-X




EHB-016-02-X




EHB-016A-02-X




EHB-017-X




EHB-018-X



EHB-019-X



EHB-020-X



EHB-021-X

EHZ SERIES
GLASS TYPE
HANDLES

Finishes :
F21, F22, F91, F93,
F94, F96, F97
Fixing Method :
X Type

EHZ-001-X



EHZ-002-X



EHZ-003-X



EHZ-004-X



EHZ-006-X




EHZ-007-X




EHZ SERIES
GLASS TYPE
HANDLES


Dimensions
in millimeters




EHZ-001-X




EHZ-002-X




EHZ-003-X



EHZ-004-X



EHZ-006-X




EHZ-007-X

GBK GLASS KNOB

Knob Handles

(For Glass)

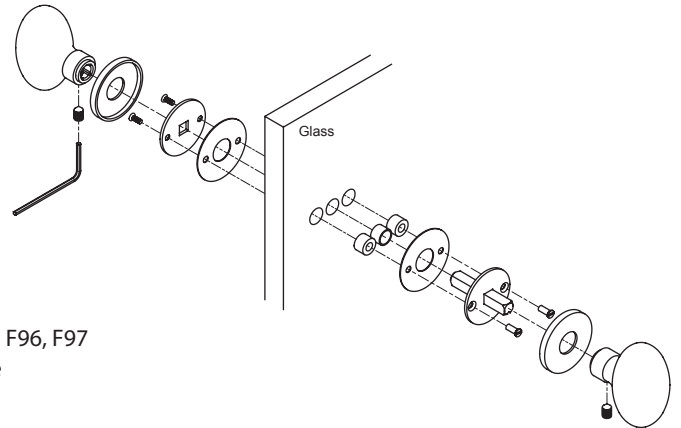

Finishes :
F21, F22, F91, F93, F94, F96, F97
Fixing Method : X Type

GBK-801-A-X

F21 Bright Chrome



GBK-802-A-X

F97 Matt Brown powder coating



GBK-803-A-X

F93 Matt White powder coating



GBK-804-A-X

F96 Matt D • Grey powder coating



GBK-805-A-X

F22 Satin Nickel



GBK-806-A-X

F21 Bright Chrome



GBK-895-X

F97 Matt Brown powder coating



GBK-896-X

F21 Bright Chrome




GBK-898-40-A-X

F94 Matt L • Grey powder coating




GBK GLASS KNOB


Dimensions
in millimeters

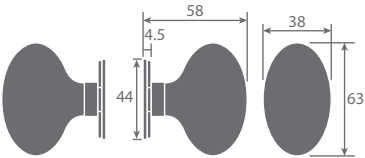


GBK-801-A-X




GBK-802-A-X

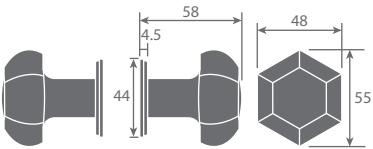


GBK-803-A-X




GBK-804-A-X

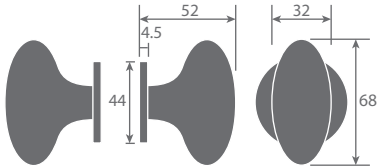


SBK-805-A-X

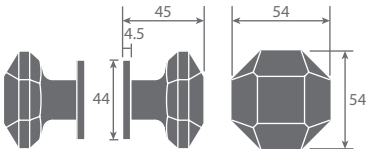


GBK-806-A-X



GBK-895-X



GBK-896-X




GBK-898-A-X

HSG SERIES

Hollow Stainless
Steel Lever Handles

(For Glass)

Finishes : F16 , F24, F25, F91, F93,
F94, F96, F97
Material : Stainless Steel (SUS 304)
Fixing Method : X Type

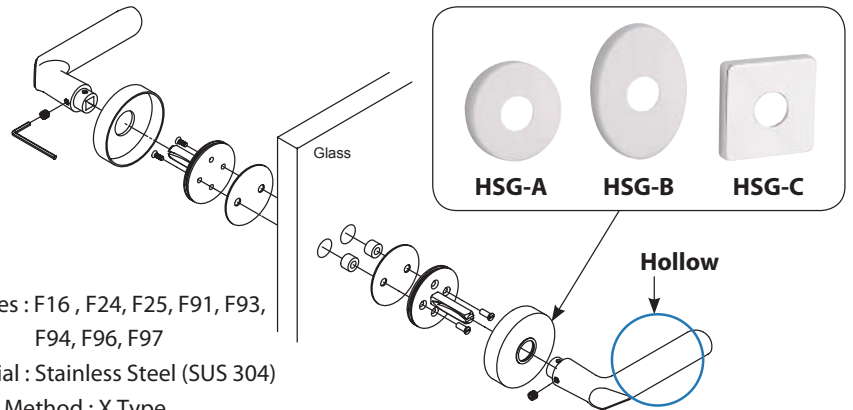

HSG-501A-X



HSG-503A-X



HSG-504A-X



HSG-506A-X



HSG-507A-X



HSG-508A-X



HSG-509A-X



HSG-512A-X



HSG-520A-X



HSG-527A-X



HSG-528A-X



HSG-529C-X



HSG-530A-X




SBG SERIES

Solid Brass
Lever Handles

(For Glass)

Finishes : F21, F22, F91, F93, F94, F96, F97
Material : Solid Brass
Fixing Method : X Type

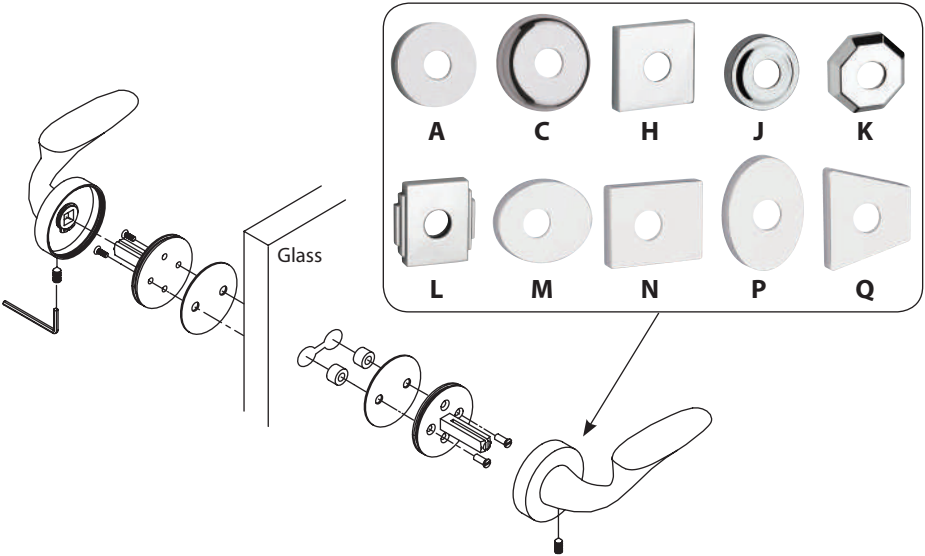

SBG-201A-X



SBG-202A-X



SBG-203C-X



SBG-204A-X



SBG-205A-X



SBG-206A-X



SBG-207A-X



SBG-208A-X



SBG-209A-X



SBG-210A-X



SBG-211A-X



SBG-212A-X



SBG-213A-X



SBG-214A-X



SBG-215A-X



SBG-216A-X



SBG-217A-X



SBG-219A-X



SBG-220A-X



SBG-221A-X



SBG-222A-X



SBG-223H-X



SBG-225A-X



SBG-226A-X




NLG SERIES

Zine Alloy
Lever Handles

(For Glass)

Finishes: F21, F22, F91, F93, F94, F96, F97
Material : Zinc Alloy
Fixing Method : X Type

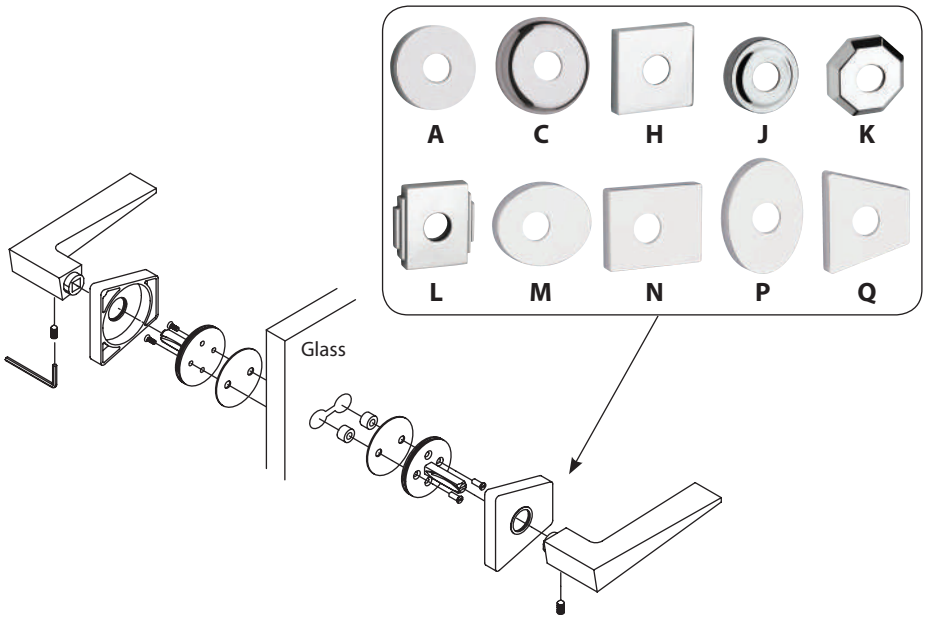

NLG-802H-X



NLG-803L-X



NLG-804K-X



NLG-805H-X



NLG-806C-X



NLG-807P-X



NLG-808M-X



NLG-809A-X



NLG-810N-X



NLG-811Q-X



NLG-812M-X



NLG-813N-X



NLG-814J-X



NLG-815C-X



NLG-816H-X

NEW



NLG-817H-X

NEW



NLG-818A-X

NEW



NLG-819C-X

NEW



NLG-820H-X

NEW



NLG-821K-X

NEW



NLG-822C-X

NEW



NLG-823H-X

NEW





Name of quality & dependability

www.boncohardware.com

BONCO Ironmongery Ltd.
Member of E. Bon Holdings Ltd. (HKEx stock code 599)

18/F, First Commercial Building, 33 Leighton Rd., Causeway Bay, H.K.
Tel : (852) 2891 2188 Fax : (852) 2834 2652

