

Lever Handles



SUS316 stainless steel hollow lever handles


HS-501-A.....	LC4
HS-503-A.....	LC4
HS-504-A.....	LC4
HS-505-A.....	LC5
HS-506-A.....	LC5
HS-507-A.....	LC5
HS-508-A.....	LC5
HS-509-A.....	LC6
HS-510-B.....	LC6
HS-511-A.....	LC6
HS-512-A.....	LC7
HS-520-A.....	LC7
HS-521-A.....	LC7
HS-523-A.....	LC7
HS-524-A.....	LC8
HS-527-A.....	LC8
HS-528-A.....	LC8
HS-529-C.....	LC9
HS-530-A.....	LC9
HS Series Dimensions.....	LC9-LC10
HS-A, HS-B, HS-C (Rose Accessories)	LC11
Cylinder Escutcheons.....	LC12
Finishes	LC12
How to Order	LC12
Lever Function.....	LC12
Installation Instruction.....	LC13
Information.....	LC14-LC15

s t a i n l e s s s t e e l h o l l o w l e v e r h a n d l e s
S U S 3 1 6 S t a i n l e s s s t e e l m a t e r i a l s




HS Series

LC4-8

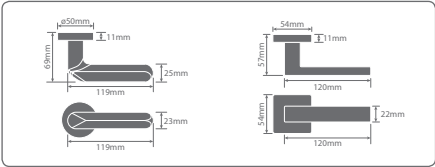

HS Series Dimension

LC9-10

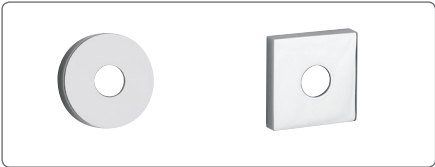

Roses Accessories

LC11



Cylinder Escutcheons

LC12




Finishes

LC12

Lever Design	Rose Design	Spindle	Finish	Door Thickness
HS-501	A	AA	F25	40-55mm
			Polished Stainless Steel	


How to Order

LC12

Code	Combination	Spindle	Door Thickness
AA	 For 40-45 Door Thickness For 45-55 Door Thickness For 40-55 Door Thickness with single pin spindle	95 110	30-45 45-55
AI	 For 40-45 Door Thickness For 45-55 Door Thickness For 40-55 Door Thickness with single pin spindle	90 110	30-42 42-55


Lever Function

LC12

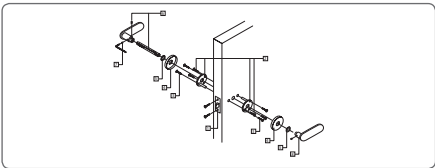

Installation Instructions

LC13

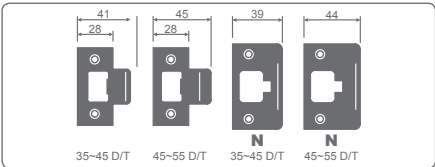

Information

LC14-15

HS SERIES

Standard Finishes:
F16, F24, F25

Stainless steel lever handles

Hollow style: light in weight, less burden to lock and latchbolt

SUS316 materials: corrosion-free with simple periodical care

Roses: spring loaded component preventing from sagging of levers


HS-501-A

F24 Satin Stainless Steel



HS-503-A

F24 Satin Stainless Steel

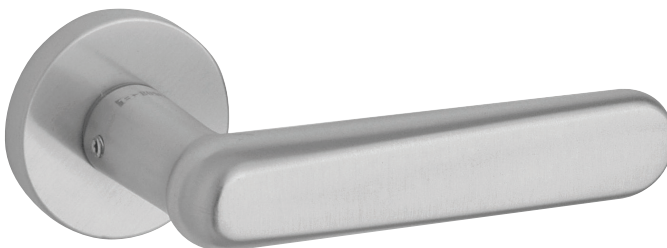

HS-504-A

F24 Satin Stainless Steel



HS-505-A

F24 Satin Stainless Steel



HS-506-A

F24 Satin Stainless Steel




HS-507-A

F24 Satin Stainless Steel



HS-508-A

F24 Satin Stainless Steel

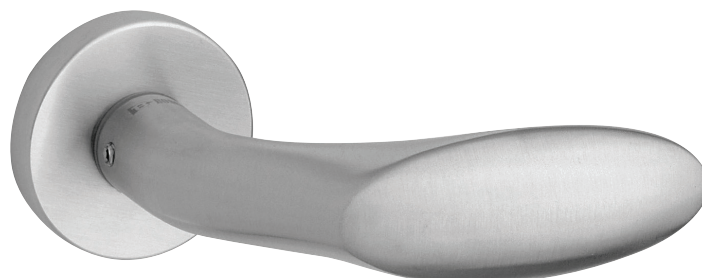

HS SERIES

Standard Finishes:
F16, F24, F25

Stainless steel lever handles

Hollow style: light in weight, less burden to lock and latchbolt

SUS316 materials: corrosion-free with simple periodical care

Roses: spring loaded component preventing from sagging of levers


HS-509-A

F24 Satin Stainless Steel




HS-510-B

F24 Satin Stainless Steel

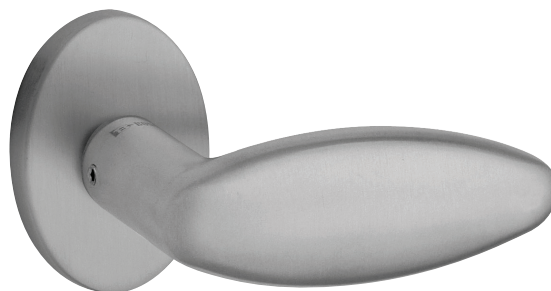

HS-511-A

F24 Satin Stainless Steel

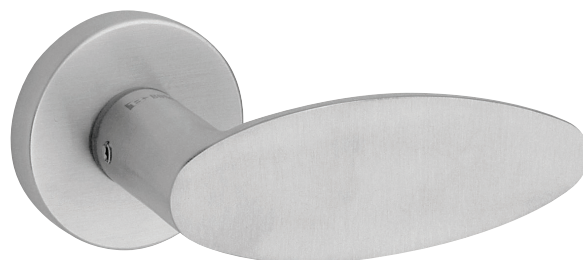

HS-512-A

F24 Satin Stainless Steel



HS-520-A

F24 Satin Stainless Steel



HS-521-A

F24 Satin Stainless Steel



HS-523-A

F25 Polished Stainless Steel



HS SERIES

Standard Finishes:
F16, F24, F25

Stainless steel lever handles

Hollow style: light in weight, less burden to lock and latchbolt

SUS316 materials: corrosion-free with simple periodical care

Roses: spring loaded component preventing from sagging of levers

HS-524-A

F25 Polished Stainless Steel



HS-527-A

F24 Satin Stainless Steel



HS-528-A

F25 Polished Stainless Steel



HS-529-C

F25 Polished Stainless Steel




HS-530-A

F24 Satin Stainless Steel




HS SERIES


Dimensions
in millimeters




HS-501-A




HS-503-A



HS-504-A




HS-505-A




HS-506-A


Dimensions
in millimeters




HS-507-A




HS-508-A




HS-509-A




HS-510-B




HS-511-A




HS-512-A




HS-520-A




HS-521-A




HS-523-A




HS-524-A




HS-527-A



HS-528-A



HS-529-C



HS-530-A

ROSES ACCESSORIES

Roses (With spring
cassette component)

cassette component



HS-A



HS-B




HS-C




ROSES ACCESSORIES

Roses (With spring
cassette component)


Dimensions
in millimeters

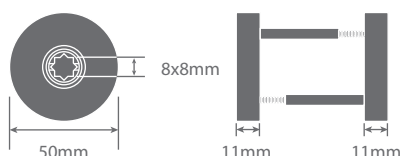

HS-A

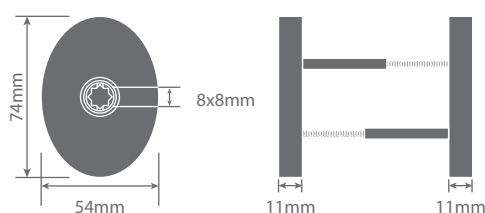

HS-B

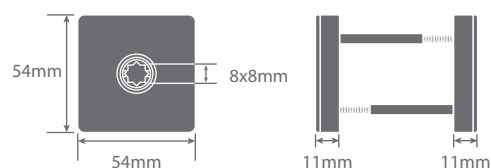

HS-C

Cylinder Escutcheons

The trim design to be chosen from Rose design A - C



HS-AE
A-design, Euro Profile
Cyl. Hole



HS-BE
B-design, Euro Profile
Cyl. Hole



HS-CE
C-design, Euro Profile
Cyl. Hole

Finishes



F16
PVD Finish



F24
Satin Stainless Steel



F25
Polished Stainless Steel


How to Order

Lever Design	Rose Design	Spindle	Finish	Door Thickness
HS-501	A	AA	F25	40~55mm
			Polished Stainless Steel	 110mm

Lever Function

Code	Combination Dimensions in mm	Splindle	Door Thickness
AA	 For basic purpose with single piece spindle	95 110	30 - 45 45 - 55
AL	 For 4653 Series Mortise Lock, with split spindles	90 110	30 - 42 42 - 55

Installation Instruction

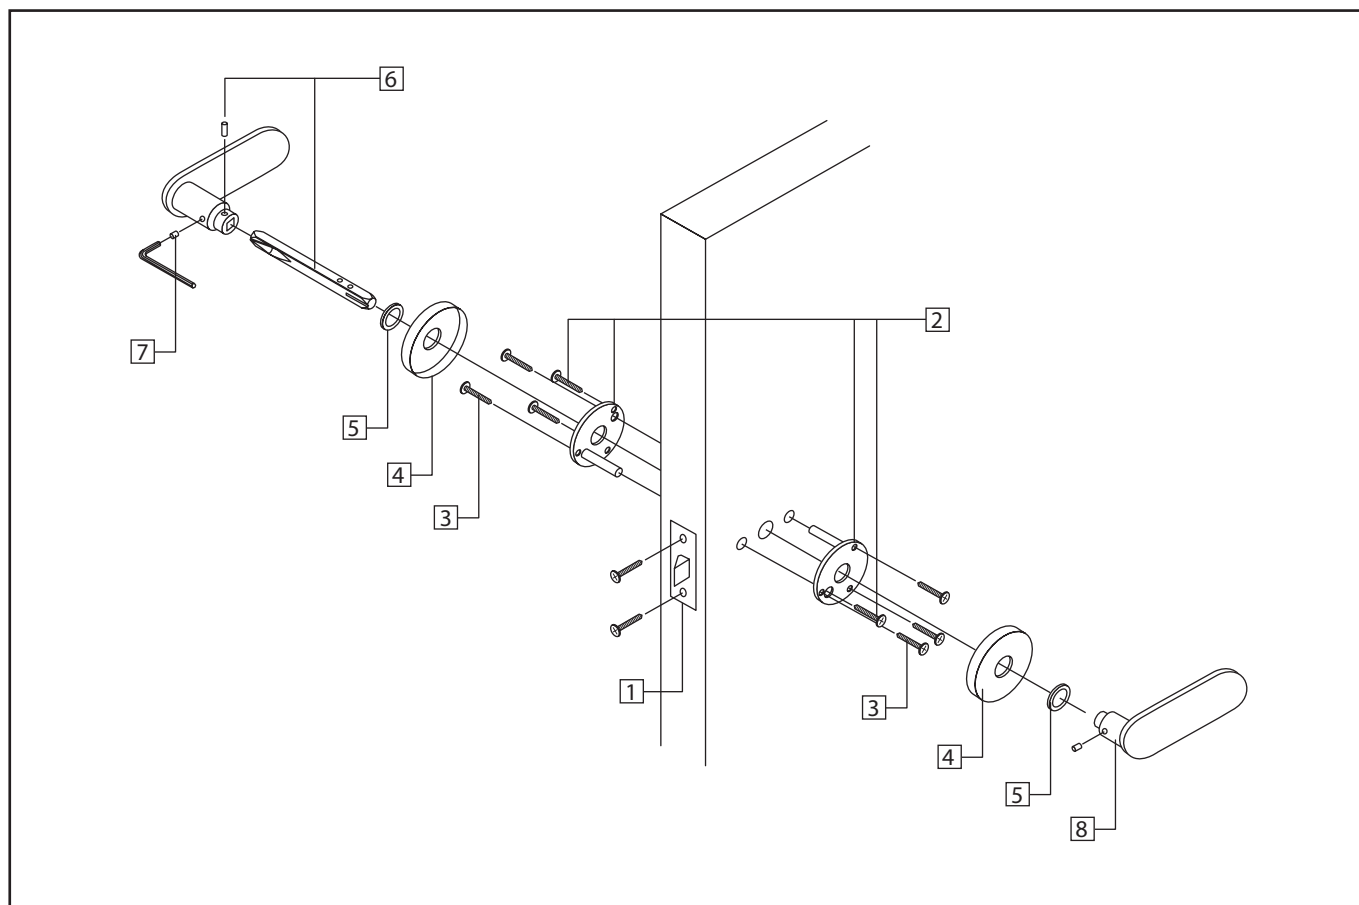




1. Install the latch or lockcase by inserting it into the cutout of the door.
2. Place the fixing brackets onto the door and fix them by tighten up two sets of (male and female screws) as shown in the diagram.
(Note: Make sure the arrow indication is correct while fixing the inside and outside brackets)
3. Reinforce and secure the fixing brackets by additional screws.
4. Snap on the rose covers to the fixing brackets on both sides of the door.
5. Place two nylon washers onto the rose covers.
6. Insert the square spindle into the lever handle and secure with a pin.
7. Tighten and secure the outside lever with the little thread screw (Upper position of the lever).
8. Fix the inside lever to the spindle and tighten up with the little thread screw (Make sure both of them are fixed firmly and seamlessly).

Preventing from forced pulling out

Outside lever has security pin in addition to the screws to prevent from forced pulling-out of the lever. Outside lever can be pulled out only when the inside fixing screw is loosen.

Information

The Series below are recommended to use with **BONCO** lever handles and rose.

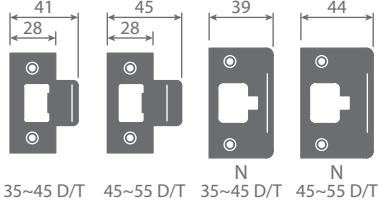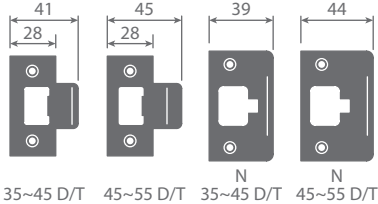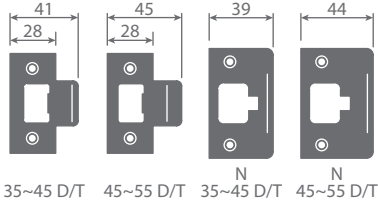Series	Backset	Door Thickness	Strike Plate Dimensions in mm	Photo	Splindle
5091 or 5091N Spring Latch with Nylon	60 & 70	35~55			AA
5091SS or 5091SSN Spring Latch with S/S Latch	60 & 70	35~55			AA
5091E or 5091EN Spring Latch with Zinc Latch	60 & 70	35~55			AA
LL Series	50	40~50			AA

Series	Backset	Door Thickness	Strike Plate Dimensions in mm	Photo	Splindle
CL Series	50	45~55			AA
CLQ Series	70	45~55			AA
4626 Series	60 & 70	35~55	  35~45 D/T 45~55 D/T		AA
4650 Series	60 & 70	35~55	  35~45 D/T 45~55 D/T		AA
4653 Series	60/70	35~55	  35~45 D/T 45~55 D/T		AA/AL



Name of quality & dependability

www.boncohardware.com

BONCO Ironmongery Ltd.

A Member of E. Bon Holdings (HKEx stock code 599)

16/F, First Commercial Building, 33 Leighton Rd., Causeway Bay, H.K.

Tel : (852) 2891 2188 Fax : (852) 2834 2652